


GUELL 1



● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-ageing silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- On request, versions with dimmable ballast available
- Passive infra-red motion sensor
- 3000 K and 5000 K available upon request




GUELL 1
S/W



GUELL 1
A/W




GUELL 1
C/I

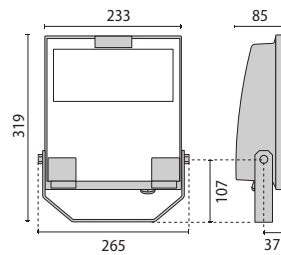

GUELL 1
S/W



GUELL 1
A/W

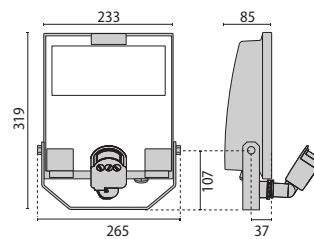

GUELL 1 S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	53 W	I		80	4000	•	S/W	-	7276 lm	6092 lm	70	10	150000 h	●	06105494
LED	39 W	I		80	4000	•	S/W	-	5558 lm	4890 lm	70	10	150000 h	●	06105794

IP 66



GUELL 1 A/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	53 W	I		80	4000	•	A40/W	-	7276 lm	5950 lm	70	10	150000 h	●	06106694
LED	39 W	I		80	4000	•	A40/W	-	5558 lm	4712 lm	70	10	150000 h	●	06106994

IP 66



GUELL 1 C/I

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	53 W	I		80	4000	•	C/I	-	7276 lm	5739 lm	70	10	150000 h	●	06289194
LED	39 W	I		80	4000	•	C/I	-	5558 lm	4599 lm	70	10	150000 h	●	06288594

IP 66



GUELL 1 DETEK S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	53 W	I		80	4000	•	S/W	-	7276 lm	6092 lm	70	10	150000 h	●	06119994

IP 44



GUELL 1 DETEK A/W

IK07 3J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	53 W	I		80	4000	•	A40/W	-	7276 lm	5950 lm	70	10	150000 h	●	06114894

IP 44




OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 1		
Protective grid GUELL 1		14172902
Connection box IP 66		14174220
Wall support 500 mm/19.69" GUELL 1/2	●	14173394
Wall support 1000 mm/39.37" GUELL 1/2	●	14173494
Single pole top support GUELL 1	●	14453194
Double pole top support GUELL 1	●	14453294
GUELL 1 A/W - GUELL 1 S/W		
Soft glass GUELL 1	●	14173294
GUELL 1 A/W		
Louvre GUELL 1 Asymmetrical		14173120
GUELL 1 S/W		
Louvre GUELL 1 Symmetrical		14173020
GUELL 1 C/I		
GUELL 1 C/I frosted glass.	●	14476594

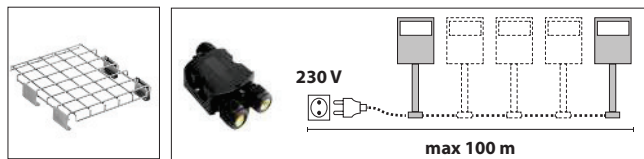

14172902

14174220

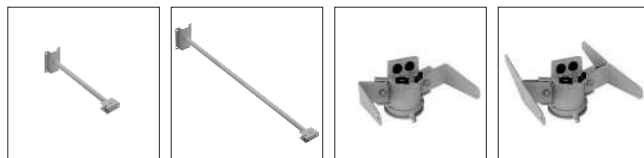


14173394

14173494

14453194

14453294

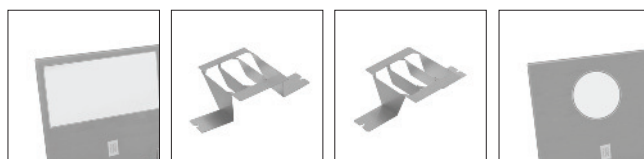

14173294

14173120

14173020

14476594

