



GUELL 2.5


design by GIORGIO LODI

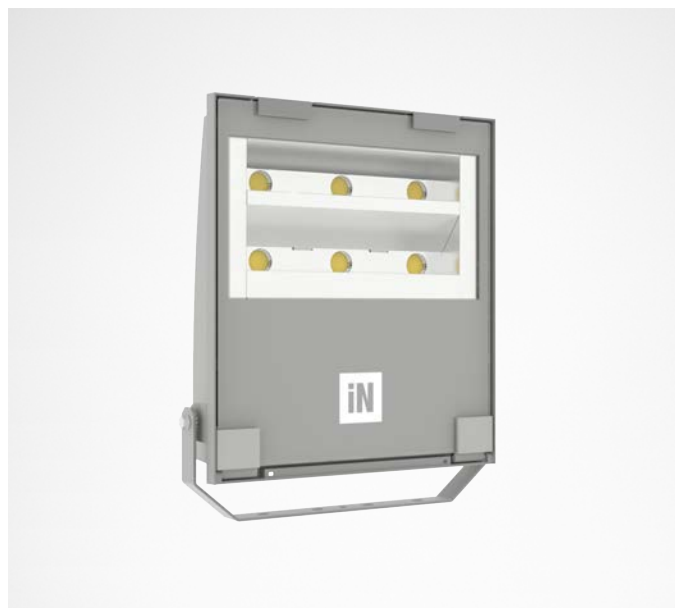


● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminium housing, powder-polyester coated ISO 9227
- Extra clear, tempered, flat glass diffuser
- High-performance polished, oxidised, iridescence-free 99.99% pure aluminium reflector
- Anti-ageing silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- ON/OFF, DALI and 1-10V version available. Consult Factory
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV
- The versions with A50/W optics comprise LED modules and reflectors specifically studied for settings that require highly asymmetrical light distribution.
- For other colour temperatures and different colour rendering index consult factory
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

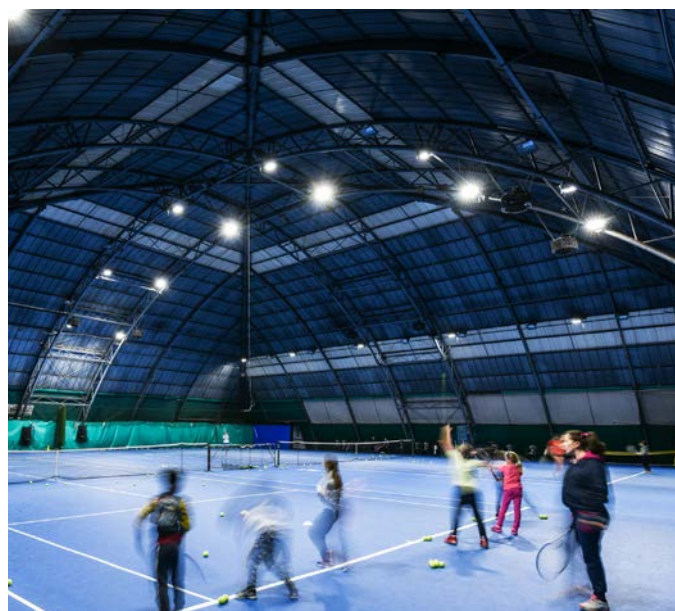


Sports center Mario Rigamonti - Brescia - Italy



GUELL 2.5 S/W

IK07 3J xx5

WATTAGE	CLASS	CE	CRI	KELVIN	COS Ø ≥0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
158 W	I	-	80	4000	✓	S/W	-	21619 lm	18062 lm	70	10	130000 h	●	306125
158 W	I	-	80	3000	✓	S/W	-	20806 lm	16764 lm	70	10	130000 h	●	3102746
Power LED dimmable 1-10 V 220-240 V 50/60 Hz														
238 W	I	-	80	4000	✓	S/W	-	33426 lm	29534 lm	70	10	130000 h	●	306201
238 W	I	-	80	3000	✓	S/W	-	33099 lm	25987 lm	70	10	130000 h	●	3102747
166 W	I	-	80	4000	✓	S/W	-	22284 lm	20195 lm	70	10	130000 h	●	306199
166 W	I	-	80	3000	✓	S/W	-	22067 lm	19547 lm	70	10	130000 h	●	3103860




GUELL 2.5 A/W

IK07 3J xx5

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Φ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
158 W	I	-	80	4000	✓	A40/W	-	21619 lm	17511 lm	70	10	130000 h	●	306126
158 W	I	-	80	3000	✓	A40/W	-	20806 lm	16069 lm	70	10	130000 h	●	3102743

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

238 W	I	-	80	4000	✓	A40/W	-	33426 lm	28464 lm	70	10	130000 h	●	306202
238 W	I	-	80	3000	✓	A40/W	-	33099 lm	25517 lm	70	10	130000 h	●	3102744
166 W	I	-	80	4000	✓	A40/W	-	22284 lm	19364 lm	70	10	130000 h	●	306200
166 W	I	-	80	3000	✓	A40/W	-	22067 lm	19096 lm	70	10	130000 h	●	3103861




GUELL 2.5 A50/W

IK07 3J xx5

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Φ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
156 W	I	✓	80	4000	✓	A50/W	-	24170 lm	18453 lm	70	10	130000 h	●	306204
156 W	I	✓	80	3000	✓	A50/W	-	23040 lm	17696 lm	70	10	130000 h	●	3103862
118 W	I	-	80	4000	✓	A50/W	-	18127 lm	13862 lm	70	10	130000 h	●	306203
118 W	I	-	80	3000	✓	A50/W	-	17280 lm	13294 lm	70	10	130000 h	●	3103863

Power LED - dimmable DALI 220-240 V 50/60 Hz

156 W	I	-	80	4000	✓	A50/W	-	24170 lm	18453 lm	70	10	130000 h	●	306206
156 W	I	-	80	3000	✓	A50/W	-	23040 lm	17696 lm	70	10	130000 h	●	3103864
118 W	I	-	80	4000	✓	A50/W	-	18127 lm	13862 lm	70	10	130000 h	●	306205
118 W	I	-	80	3000	✓	A50/W	-	17280 lm	13294 lm	70	10	130000 h	●	3103865




GUELL 2.5 C/I

IK07 3J xx5

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Φ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
158 W	I	-	80	4000	✓	C/I	-	21619 lm	17576 lm	70	10	130000 h	●	306207
158 W	I	-	80	3000	✓	C/I	-	22060 lm	18166 lm	70	10	130000 h	●	3103866

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

238 W	I	-	80	4000	✓	C/I	-	33426 lm	27961 lm	70	10	130000 h	●	306210
166 W	I	-	80	4000	✓	C/I	-	22284 lm	18999 lm	70	10	130000 h	●	306209
166 W	I	-	80	3000	✓	C/I	-	22067 lm	19181 lm	70	10	130000 h	●	3103867




OPTIONAL ACCESSORIES


DESCRIPTION	COLOR	PART NUMBER
GUELL 2.5 S/W (166 W - 238 W)		
Louvre GUELL 2.5 Symmetrical		310961
GUELL 2.5 A/W (166 W - 238 W)		
Louvre GUELL 2.5 Symmetrical A40/W		310962
GUELL 2.5 A/W - S/W (166 W - 238 W)		
GUELL 2.5 frosted glass		310964
GUELL 2.5		
Cover GUELL 2.5 A40/W	●	310963
Protective grid GUELL 2.5		310965
Wall mount support 1000 mm	●	310982
Double pole top support GUELL 2.5	●	310967
Single pole top support GUELL 2.5	●	310966
Steel 'U' bolt clamp for Ø 60-80 mm poles painted aluminium grey	●	14012294



14453994




310961




310962



310964




310963



310965



310982



310967



310966



14012294

PROFESSIONAL