

GUELL 3



● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat extra clear tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-ageing silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- The versions with A50/W optics comprise LED modules and reflectors specifically studied for settings that require highly asymmetrical light distribution.
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- 3000 K and 5000 K available upon request




GUELL 3
A/W



GUELL 3
A50/W



GUELL 3
S/W

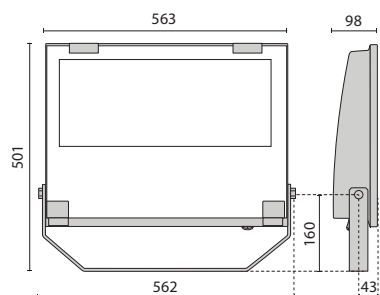

GUELL 3 S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED dimmable 1-10 V 220-240 V 50/60 Hz														
LED	317 W	I	80	4000	•	S/W	-	44312 lm	36028 lm	70	10	130000 h	●	06171694
LED	238 W	I	80	4000	•	S/W	-	33234 lm	26947 lm	70	10	130000 h	●	06172894



GUELL 3 A/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED dimmable 1-10 V 220-240 V 50/60 Hz														
LED	317 W	I	80	4000	•	A40/W	-	44312 lm	33867 lm	70	10	130000 h	●	06171094
LED	238 W	I	80	4000	•	A40/W	-	33234 lm	25329 lm	70	10	130000 h	●	06172294



GUELL 3 A50/W

IK07 3J xx5


LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	305 W	I	80	4000	•	A50/W	-	48341 lm	35814 lm	80	10	55000 h	●	306114
LED	231 W	I	80	4000	•	A50/W	-	36256 lm	27496 lm	80	10	55000 h	●	306116



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 3 A/W - S/W		
Frosted glass GUELL 3 (not suitable for 158 W).	●	14452994
GUELL 3 A/W		
Louvre GUELL 3 Asymmetrical (not suitable for 158 W).		14454520
GUELL 3 S/W		
Louvre GUELL 3 Symmetrical (not suitable for 158 W).		14454220

DESCRIPTION	COLOR	PART NUMBER
GUELL 3		
Cover	●	14452894
Protective grid		14452702
Wall mount support 1000 mm/39,37"	●	14453994
Single pole top support GUELL 3 for poles \varnothing 60-76 mm/ \varnothing 2,36"-2,99".	●	14453794
Double pole top support GUELL 3 for poles \varnothing 60-76 mm/ \varnothing 2,36"-2,99"	●	14453894
GUELL 3 strengthening bracket. Suitable for one floodlight single point fixing M10 screw in centre of the bracket.	●	14461104

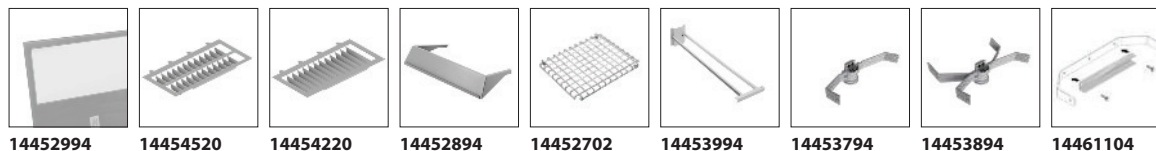

14452994 14454520 14454220 14452894 14452702 14453994 14453794 14453894 14461104

