

# GUELL 4



Scan the QR-code for the latest information


■ GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor, comprising:


- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Technopolymer electrical connection box
- Cable gland for cables Ø 7 - Ø 17 mm
- High asymmetrical distributions low-glare optic options available (A50/W versions)
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Galvanised powder-coated steel bracket
- Polyester powder coat steel sheet gear housing
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Openable and maintainable luminaire (future-proof)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- Consult factory for dimmable DALI versions with remote supply unit, up to a 50-metre maximum distance (A50/W models only)
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08
- Design by GIORGIO LODI



Schierker Feuerstein arena - Wernigerode - Germany

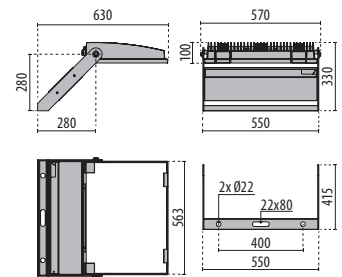

Identifying and classifying our optics

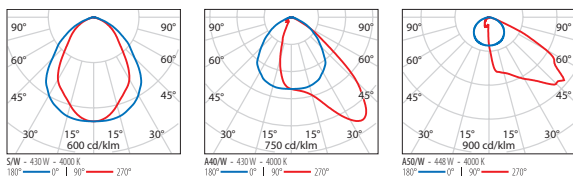

## GUELL 4 A/W

IP66 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>										
428	I	-	80	4000	A40/W	-	62472	50539	■	<b>3117452</b>
428	I	-	80	3000	A40/W	-	59100	47624	■	<b>3117450</b>
<b>Power LED dimmable 1-10 V 220-240 V 50/60 Hz</b>										
428	I	-	80	4000	A40/W	-	62472	50539	■	<b>3117451</b>
428	I	-	80	3000	A40/W	-	59100	47624	■	<b>3117449</b>

5000K versions are available on web



## GUELL 4 S/W

IP66 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>										
428	I	-	80	4000	S/W	-	62472	55187	■	<b>3117458</b>
428	I	-	80	3000	S/W	-	59100	50539	■	<b>3117456</b>
<b>Power LED dimmable 1-10 V 220-240 V 50/60 Hz</b>										
428	I	-	80	4000	S/W	-	62472	55187	■	<b>3117457</b>
428	I	-	80	3000	S/W	-	59100	55539	■	<b>3117455</b>

5000K versions are available on web



## GUELL 4 A50/W

IP66 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>										
448	I	-	80	4000	A50/W	-	72511	52346	■	<b>306128</b>

5000K versions are available on web



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER
<b>GUELL 4 A/W - S/W</b>		
Vetro soft GUELL 4	■	<b>14465794</b>
<b>GUELL 4 A/W</b>		
Louvre A40/W	■	<b>14452894</b>
Louvre GUELL 3-4 A50/W	■	<b>3102585</b>
<b>GUELL 4</b>		
Protective grid		<b>14452702</b>



14465794



14452894  
3102585



14452702