


ELIA FL MINI XS2 20W 100° PIR

Part number GWF1105BL830

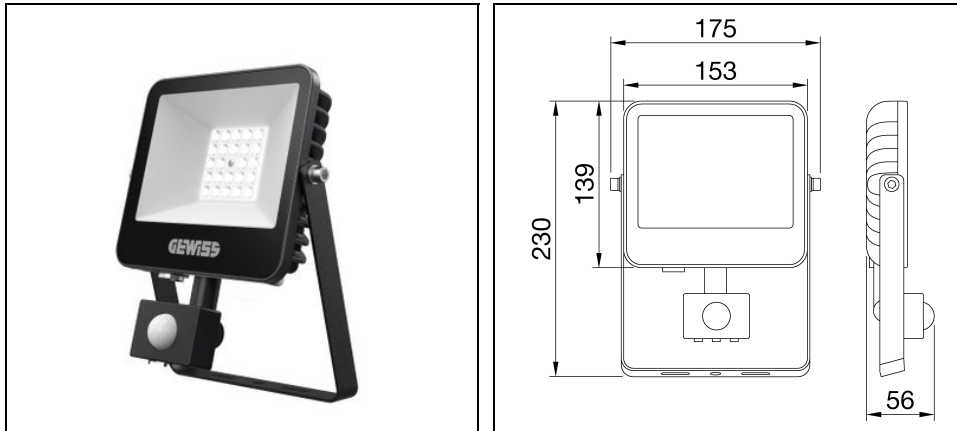

Description

Low-power LED floodlight for indoor and outdoor architectural lighting for both residential and professional applications, such as façades, gardens, green areas and walkways

- Thanks to its black powder-coated die-cast aluminium body and its front glass, it is tough, durable and able to withstand harsh environmental conditions
- Available in 2 sizes and 3 power steps (10 W, 20 W and 30 W), the range allows for great flexibility with its multiple possible combinations: 2 colour temperature options (3,000 K warm white and 4,000 K neutral white) with a colour rendering index of more than 80, and 2 optics options (100° or asymmetrical)
- The fixture is equipped with an integrated On/Off electronic power supply, and it is also available with an integrated motion and luminosity sensor
- The luminaire can be ceiling, wall or floor-mounted through the integrated adjustable steel bracket

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC001744
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Luminaire lumen output [lm]:	2300	Luminaire wattage [W]:	20 W
Luminous efficacy [lm/W]:	115	CRI:	80
Colour temperature [K]:	3000	Colour / Finishing:	Black RAL 9017 / Black RAL9017
IP degree of protection:	IP65	IK-J-xxIP:	IK08 5J xx5
Protection class:	I	Optic:	SYMM - Symmetric
Beam angle:	100°	Net weight [kg]:	0.86
Overall length [mm]:	230	Overall width [mm]:	175
Overall height [mm]:	56		

Mechanical features

Housing material:	Aluminium	Diffuser material:	Glass
Glow wire test [°C]:	750 °C		

Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	50/60		

Installation


Application area:	Outdoor	Mounting type:	Floodlighting
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	40

Light features

MacAdam:	5	Lumen maintenance:	L80B50@g00000h
Distribution of light emission:	Direct	IPEA* (green areas):	A3+

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>

Photometric data

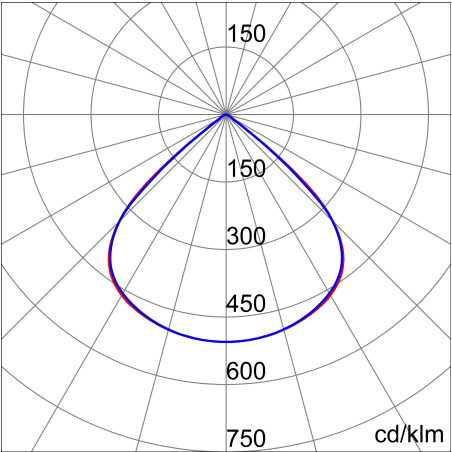

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>