


ELIA OL

Part number GWF2100FR840

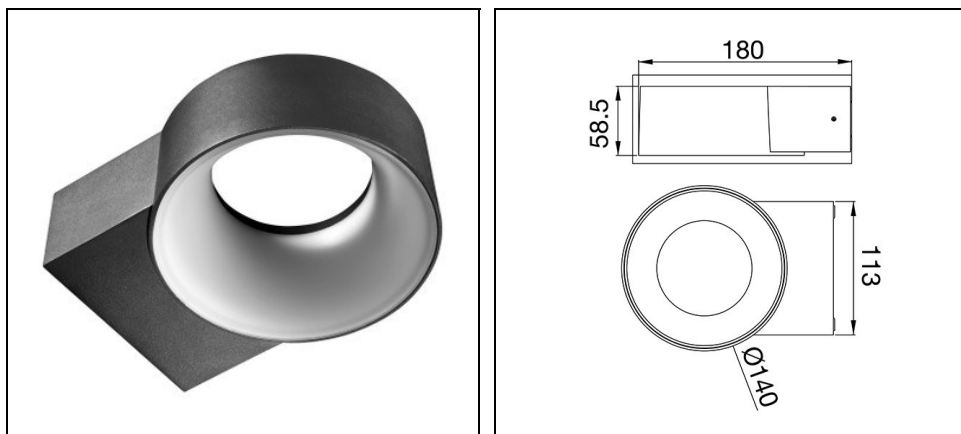

Description

Die-cast aluminum fixture for wall mounting, ideal for indoor and outdoor architectural lighting such as: stairs, passageways or facades, quick and easy to install, with a clean and essential line:

- Designed in two different finishes (black and white), with double emission diffusing polycarbonate opal screen (top and down) to create a comfortable atmosphere, color temperatures of 3,000K, 4,000 K and 5,700 K and a color rendering index greater than 80
- It has been designed to withstand temperature variations from -20 ° C to + 45 ° C, water and dust penetration up to IP65 degree and shocks up to IK08 degree
- Light and handy, it is easy to install thanks also to the rear bracket for fixing, the quick-fit terminal placed in the back for the electrical wiring

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Luminaire lumen output [lm]:	650	Luminaire wattage [W]:	8 W
Luminous efficacy [lm/W]:	81	CRI:	80
Colour temperature [K]:	4000	Colour / Finishing:	BK-RAL9005 / Black RAL9005
IP degree of protection:	IP65	IK-J-xxIP:	IK08 5J xx5
Protection class:	I	Optic:	OPAL - Opal
Net weight [kg]:	0.75	Overall length [mm]:	180
Overall width [mm]:	140	Overall height [mm]:	59

Mechanical features

Housing material:	Aluminium	Diffuser material:	Plastic
Glow wire test [°C]:	750 °C		

Electrical features

Voltage type:	AC	Input voltage [V AC]:	100/240
Input frequency [Hz]:	50/60		

Installation


Application area:	Outdoor	Mounting type:	Wall surface
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	45

Light features

MacAdam:	5	Lumen maintenance:	L80B50@50000h
Distribution of light emission:	Direct	IPEA* (green areas):	B

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>

Photometric data

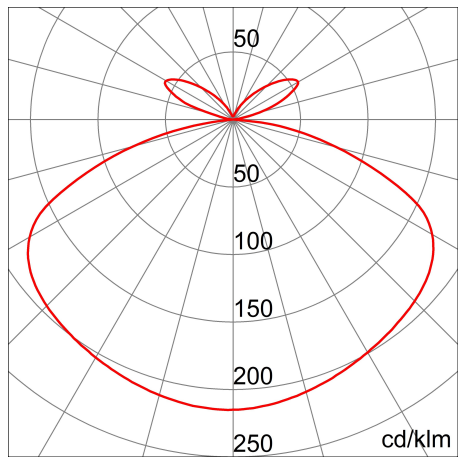

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>