


ELIA EL

Part number GWF2210LA857

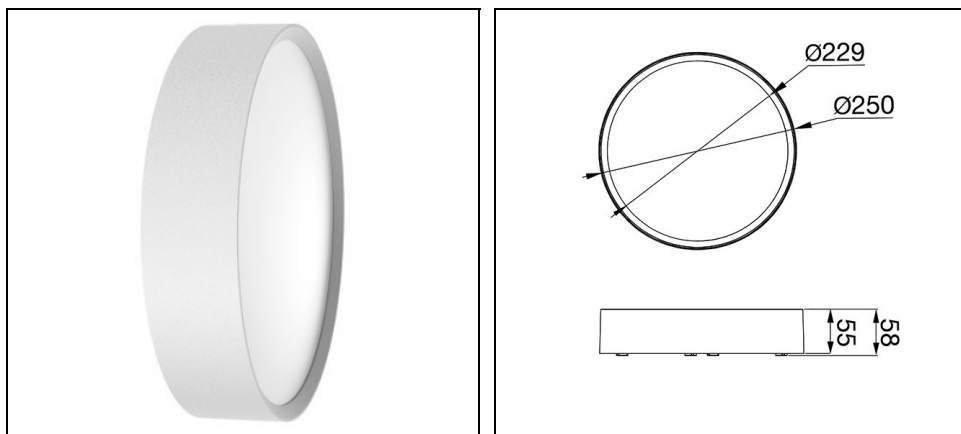

Description

Die-cast aluminum LED luminaire for ceiling or wall mounting, ideal for the lighting of exteriors and interiors such as: stairs, passageways, service rooms, simple and quick to install, with a clean line and essential

- Designed in two different finishes (black and white), with opal diffuser in polycarbonate, color temperatures 3.000K, 4.000 K and 5.700 K and color rendering index higher than 80
- It has been designed to withstand temperature variations from -20 ° C to + 50 ° C, water and dust penetration up to IP65 degree and shocks up to IK08 degree
- Lightweight and handy ELIA EL is easy to install thanks to the quick connection terminal for the electrical wiring placed in the rear part and to the second cable outlet for pass-through wiring

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Luminaire lumen output [lm]:	1700	Luminaire wattage [W]:	18 W
Luminous efficacy [lm/W]:	94	CRI:	80
Colour temperature [K]:	5700	Colour / Finishing:	WH-RAL9016 / White RAL9016
IP degree of protection:	IP65	IK-J-xxIP:	IK08 5J xx5
Protection class:	I	Optic:	OPAL - Opal
Net weight [kg]:	1.375	Overall diameter [mm]:	250
Overall height [mm]:	58		

Mechanical features

Housing material:	Aluminium	Diffuser material:	Plastic
Glow wire test [°C]:	750 °C		

Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	50/60		

Installation


Application area:	Outdoor	Mounting type:	Bulkheads
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	50

Light features

MacAdam:	5	Lumen maintenance:	L80B50@50000h
Distribution of light emission:	Direct	IPEA* (green areas):	A

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>

Photometric data

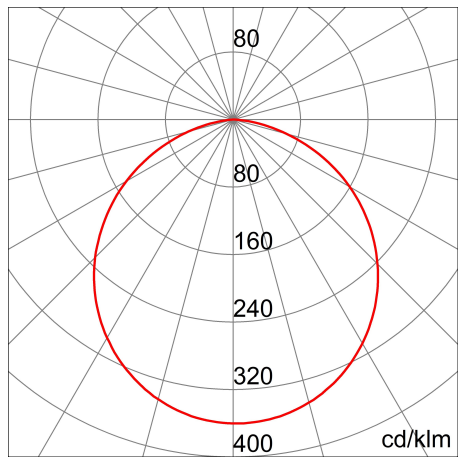

To maintain the regular updating of our products, GEWISS reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.gewiss.com/ww/en/about-gewiss/standard-sales-conditions/led-warranty>

For information:
GEWISS S.p.A.
Via Domenico Bosatelli 1 - 24069 Cenate Sotto
Bergamo - Italy
Tel. +39 035 946 111

gewiss@gewiss.com
www.performanceinlighting.com