




Luminaire with white painted protection grid for installations such as gym and indoor sports facilities, includes:


- Enamelled steel housing
- Optical system with integrated PMMA prismatic diffuser with high light transmission (>92%)
- Reinforced protective grille (IK10) with safety catch.
- The DA versions are dual power switch versions
- The Gym+3 model with double switch allows three

lighting options: central LED lighting only, lighting with the two lateral LEDs and full lighting.

- Versions are available with ON-OFF driver and dimmable DALI
- Ceiling installation or suspension by means of steel chain only. Rotation option using rotation kit accessory.
- Compliant to DIN 18032-3 (Ball-Proof)



○ WH-87 / White / Glossy

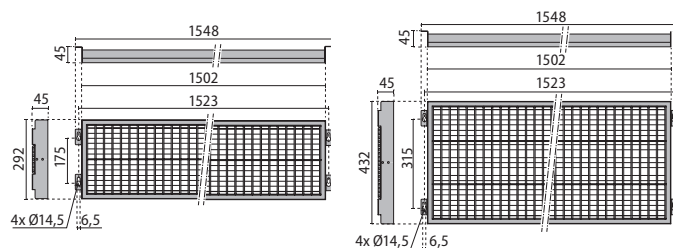

GYM+ 2

GYM+ 3



Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.

GYM+ 2

IK10 20J xx9

WATTAGE	CLASS	CE	CRI	KELVIN	COS Ø	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
114 W	I	-	80	4000	✓	S/EW	-	13500 lm	11523 lm	80	10	80000 h	○	3100004
83 W	I	-	80	4000	✓	S/EW	-	10050 lm	8991 lm	80	10	80000 h	○	3100003



Power LED - dimmable DALI 220-240 V 50/60 Hz

114 W	I	-	80	4000	✓	S/EW	-	13500 lm	11523 lm	80	10	80000 h	○	3100006
-------	---	---	----	------	---	------	---	----------	----------	----	----	---------	---	----------------

GYM+ 3

IK10 20J xx9

WATTAGE	CLASS	CE	CRI	KELVIN	COS Ø	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
105 W +55 W	I	-	80	4000	✓	S/EW	-	17136 lm	16113 lm	80	10	80000 h	○	3100005
Power LED - dimmable DALI 220-240 V 50/60 Hz														
160 W	I	-	80	4000	✓	S/EW	-	17136 lm	16113 lm	80	10	80000 h	○	3100007

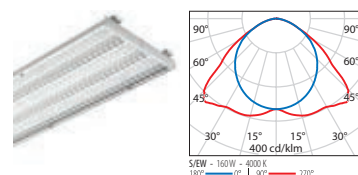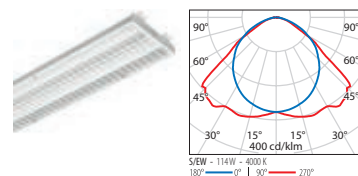

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GYM		
GYM+ KIT rotation	○	3100000