

GUELL 1+



Grotte di Frasassi - Genga - Italy





Scan the QR-code for the latest information

■ GR-94 / Metallic grey / Textured


LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- M20x1.5 cable gland for cables Ø10-Ø14 mm
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Powder-coated steel tiltable bracket
- Openable and maintainable luminaire (future-proof)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- For integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM) consult factory
- Design by GIORGIO LODI



GUELL 1+

Identifying and classifying our optics

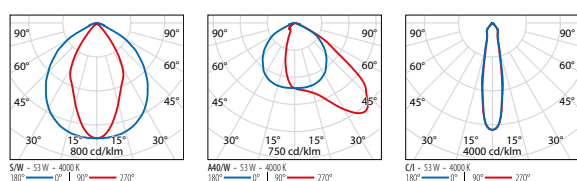

GUELL 1+ A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
51	I	✓	80	5000	A40/W	-	8262	6635	■	LTF1123FA850	✓
51	I	✓	80	4000	A40/W	-	8262	6705	■	LTF1123FA840	✓
51	I	✓	80	3000	A40/W	-	7863	6440	■	LTF1123FA830	✓
36	I	✓	80	5000	A40/W	-	6196	5215	■	LTF1122FA850	✓
36	I	✓	80	4000	A40/W	-	6196	5270	■	LTF1122FA840	✓
36	I	✓	80	3000	A40/W	-	5897	5180	■	LTF1122FA830	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
51	I	✓	80	5000	A40/W	-	8279	6635	■	LTF1123DA850	✓
51	I	✓	80	4000	A40/W	-	8262	6705	■	LTF1123DA840	✓
51	I	✓	80	3000	A40/W	-	7863	6440	■	LTF1123DA830	✓
36	I	✓	80	5000	A40/W	-	6196	5215	■	LTF1122DA850	✓
36	I	✓	80	4000	A40/W	-	6196	5270	■	LTF1122DA840	✓
36	I	✓	80	3000	A40/W	-	5897	5180	■	LTF1122DA830	✓



GUELL 1+ S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
51	I	✓	80	5000	S/W	-	8262	6995	■	LTF1123FS850	✓
51	I	✓	80	4000	S/W	-	8262	7070	■	LTF1123FS840	✓
51	I	✓	80	3000	S/W	-	7863	6810	■	LTF1123FS830	✓
36	I	✓	80	5000	S/W	-	6196	5495	■	LTF1122FS850	✓
36	I	✓	80	4000	S/W	-	6196	5555	■	LTF1122FS840	✓
36	I	✓	80	3000	S/W	-	5897	5380	■	LTF1122FS830	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
51	I	✓	80	5000	S/W	-	8262	6995	■	LTF1123DS850	✓
51	I	✓	80	4000	S/W	-	8262	7070	■	LTF1123DS840	✓
51	I	✓	80	3000	S/W	-	7863	6810	■	LTF1123DS830	✓
36	I	✓	80	5000	S/W	-	6196	5495	■	LTF1122DS850	✓
36	I	✓	80	4000	S/W	-	6196	5555	■	LTF1122DS840	✓
36	I	✓	80	3000	S/W	-	5897	5380	■	LTF1122DS830	✓



Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
GUELL 1+			
Louvre GUELL 1+	■	LTF1A3152	✓
Single pole top support GUELL 1+	■	LTF1A2112	✓
Double pole top support GUELL 1+	■	LTF1A2122	✓
Wall support 500 mm/19.69" GUELL 1/2	■	14173394	✓
Wall support 1000 mm/39.37" GUELL 1/2	■	14173494	✓



LTF1A2112




LTF1A2122



14173394



14173494

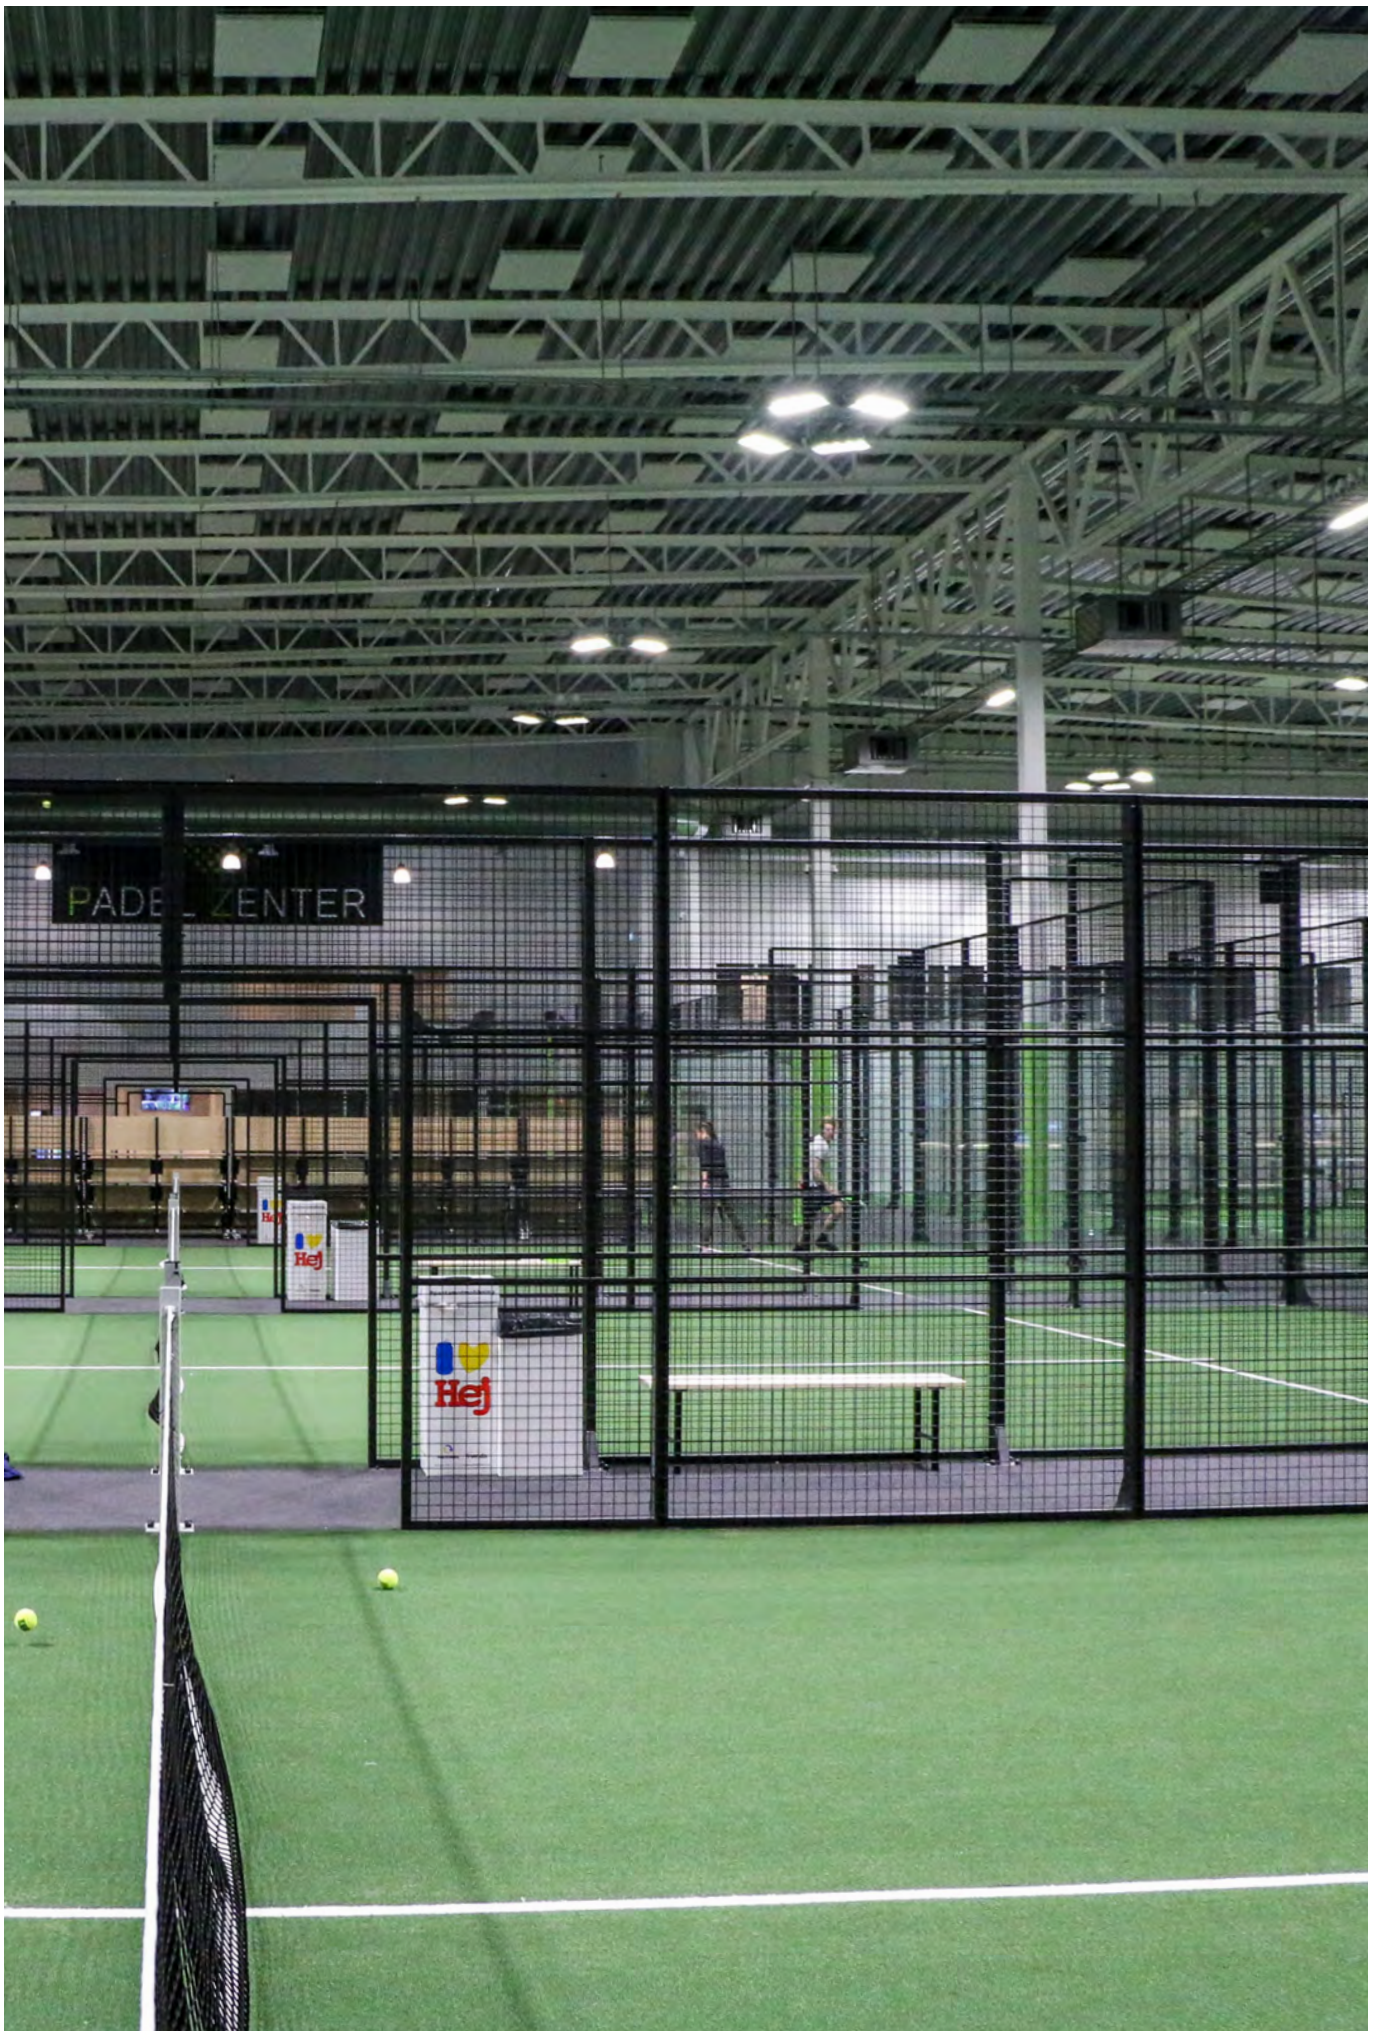

Padel Zenter - Jönköping - Sweden