


GUELL 2+



Church of St. George in Braida - Verona - Italy

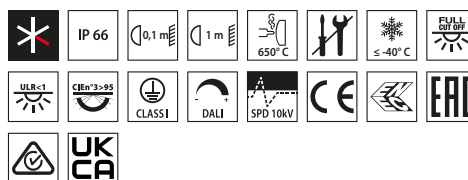


Scan the QR-code for the latest information

■ GR-94 / Metallic grey / Textured


LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- M20x1.5 cable gland for cables Ø10-Ø14 mm
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Powder-coated steel tiltable bracket
- Openable and maintainable luminaire (future-proof)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- For integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM) consult factory
- Design by GIORGIO LODI



GUELL 2+

Identifying and classifying our optics

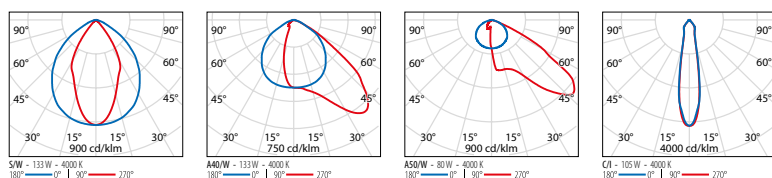

GUELL 2+ A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
149	I	✓	80	5000	A40/W	-	24733	20975	■	LTF1225FA850	✓
149	I	✓	80	4000	A40/W	-	24733	21505	■	LTF1225FA840	✓
149	I	✓	80	3000	A40/W	-	23800	20645	■	LTF1225FA830	✓
128	I	✓	80	5000	A40/W	-	20310	17705	■	LTF1224FA850	✓
128	I	✓	80	4000	A40/W	-	20310	17705	■	LTF1224DA850	✓
128	I	✓	80	4000	A40/W	-	20310	17975	■	LTF1224FA840	✓
128	I	✓	80	3000	A40/W	-	19550	17060	■	LTF1224FA830	✓
103	I	✓	80	5000	A40/W	-	16522	13460	■	LTF1223FA850	✓
103	I	✓	80	4000	A40/W	-	16522	13665	■	LTF1223FA840	✓
103	I	✓	80	3000	A40/W	-	15725	13010	■	LTF1223FA830	✓
74	I	✓	80	5000	A40/W	-	12391	10475	■	LTF1222FA850	✓
74	I	✓	80	4000	A40/W	-	12391	10635	■	LTF1222FA840	✓
74	I	✓	80	3000	A40/W	-	11794	9990	■	LTF1222FA830	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

149	I	✓	80	5000	A40/W	-	24733	20975	■	LTF1225DA850	✓
149	I	✓	80	4000	A40/W	-	24733	21505	■	LTF1225DA840	✓
149	I	✓	80	3000	A40/W	-	23800	20645	■	LTF1225DA830	✓
128	I	✓	80	4000	A40/W	-	20310	17975	■	LTF1224DA840	✓
128	I	✓	80	3000	A40/W	-	19550	17060	■	LTF1224DA830	✓
103	I	✓	80	5000	A40/W	-	16522	13460	■	LTF1223DA850	✓
103	I	✓	80	4000	A40/W	-	16522	13665	■	LTF1223DA840	✓
103	I	✓	80	3000	A40/W	-	15725	13010	■	LTF1223DA830	✓
74	I	✓	80	5000	A40/W	-	12391	10475	■	LTF1222DA850	✓
74	I	✓	80	4000	A40/W	-	12391	10635	■	LTF1222DA840	✓
74	I	✓	80	3000	A40/W	-	11794	9990	■	LTF1222DA830	✓



GUELL 2+ S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
149	I	✓	80	5000	S/W	-	24733	21225	■	LTF1225FS850	✓
149	I	✓	80	4000	S/W	-	24733	21770	■	LTF1225FS840	✓
149	I	✓	80	3000	S/W	-	23800	20950	■	LTF1225FS830	✓
128	I	✓	80	5000	S/W	-	20310	18195	■	LTF1224FS850	✓
128	I	✓	80	4000	S/W	-	20310	18475	■	LTF1224FS840	✓
128	I	✓	80	3000	S/W	-	19550	17555	■	LTF1224FS830	✓
103	I	✓	80	5000	S/W	-	16552	13820	■	LTF1223FS850	✓
103	I	✓	80	4000	S/W	-	16522	14030	■	LTF1223FS840	✓
103	I	✓	80	3000	S/W	-	15725	13345	■	LTF1223FS830	✓
74	I	✓	80	5000	S/W	-	12391	10715	■	LTF1222FS850	✓
74	I	✓	80	4000	S/W	-	12391	10880	■	LTF1222FS840	✓
74	I	✓	80	3000	S/W	-	11794	10350	■	LTF1222FS830	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

149	I	✓	80	5000	S/W	-	24733	21225	■	LTF1225DS850	✓
149	I	✓	80	4000	S/W	-	24733	21770	■	LTF1225DS840	✓
149	I	✓	80	3000	S/W	-	23800	20950	■	LTF1225DS830	✓
128	I	✓	80	5000	S/W	-	20310	18195	■	LTF1224DS850	✓
128	I	✓	80	4000	S/W	-	20310	18475	■	LTF1224DS840	✓
128	I	✓	80	3000	S/W	-	19550	17555	■	LTF1224DS830	✓
103	I	✓	80	5000	S/W	-	16522	13820	■	LTF1223DS850	✓
103	I	✓	80	4000	S/W	-	16522	14030	■	LTF1223DS840	✓
103	I	✓	80	3000	S/W	-	15725	13345	■	LTF1223DS830	✓
74	I	✓	80	5000	S/W	-	12391	10715	■	LTF1222DS850	✓
74	I	✓	80	4000	S/W	-	12391	10880	■	LTF1222DS840	✓
74	I	✓	80	3000	S/W	-	11794	10350	■	LTF1222DS830	✓




Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
GUELL 2+			
Louvre GUELL 2+		LTF1A3252	✓
Protective grid GUELL 2+		LTF1A5203	✓
Single pole top support GUELL 2+		LTF1A2212	✓
Double pole top support GUELL 2+		LTF1A2222	✓
Wall support 500 mm/19.69" GUELL 1/2		14173394	✓
Wall support 1000 mm/39.37" GUELL 1/2		14173494	✓




LTF1A3252




LTF1A2212



LTF1A2222



14173394



14173494



Timing sport center - Brescia - Italy