


GUELL 2.5+

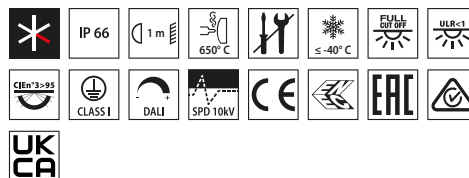

■ GR-94 / Metallic grey / Textured


Scan the QR-code for the latest information

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- M20x1.5 cable gland for cables Ø10-Ø14 mm
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Powder-coated steel tiltable bracket
- Openable and maintainable luminaire (future-proof)
- Protected against power surges up to 10 kV
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- Design by GIORGIO LODI




Sports center Mario Rigamonti - Brescia - Italy



GUELL 2.5+

Identifying and classifying our optics

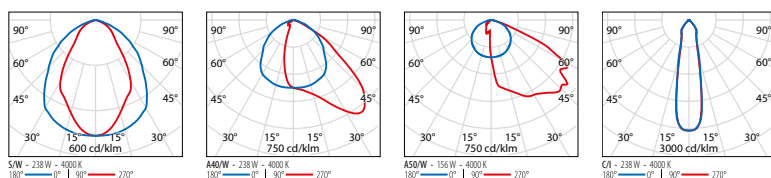

GUELL 2.5+ A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
212	I	✓	80	5000	A40/W	-	32622	26655	■	LTF1625FA850	✓
212	I	✓	80	4000	A40/W	-	33288	27200	■	LTF1625FA840	✓
212	I	✓	80	3000	A40/W	-	30960	25295	■	LTF1625FA830	✓
193	I	✓	80	5000	A40/W	-	31002	25465	■	LTF1624FA850	✓
193	I	✓	80	4000	A40/W	-	31476	25855	■	LTF1624FA840	✓
193	I	✓	80	3000	A40/W	-	29292	24045	■	LTF1624FA830	✓
175	I	✓	80	5000	A40/W	-	28032	22905	■	LTF1623FA850	✓
175	I	✓	80	4000	A40/W	-	28602	23365	■	LTF1623FA840	✓
175	I	✓	80	3000	A40/W	-	26598	21730	■	LTF1623FA830	✓
153	I	✓	80	5000	A40/W	-	26388	21530	■	LTF1622FA850	✓
153	I	✓	80	4000	A40/W	-	26928	21970	■	LTF1622FA840	✓
153	I	✓	80	3000	A40/W	-	24906	20315	■	LTF1622FA830	✓

Power LED dimmable DALI - 220-240 V 50/60 Hz

212	I	✓	80	5000	A40/W	-	32622	26655	■	LTF1625DA850	✓
212	I	✓	80	4000	A40/W	-	33288	27200	■	LTF1625DA840	✓
212	I	✓	80	3000	A40/W	-	30960	25295	■	LTF1625DA830	✓
193	I	✓	80	5000	A40/W	-	31002	25465	■	LTF1624DA850	✓
193	I	✓	80	4000	A40/W	-	31476	25855	■	LTF1624DA840	✓
193	I	✓	80	3000	A40/W	-	29292	24045	■	LTF1624DA830	✓
175	I	✓	80	5000	A40/W	-	28032	22905	■	LTF1623DA850	✓
175	I	✓	80	4000	A40/W	-	28602	23365	■	LTF1623DA840	✓
175	I	✓	80	3000	A40/W	-	26598	21730	■	LTF1623DA830	✓
153	I	✓	80	5000	A40/W	-	26388	21530	■	LTF1622DA850	✓
153	I	✓	80	4000	A40/W	-	26928	21970	■	LTF1622DA840	✓
153	I	✓	80	3000	A40/W	-	24906	20315	■	LTF1622DA830	✓

GUELL 2.5+ S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
212	I	✓	80	5000	S/W	-	32622	27185	■	LTF1625FS850	✓
212	I	✓	80	4000	S/W	-	33288	27740	■	LTF1625FS840	✓
212	I	✓	80	3000	S/W	-	30960	25800	■	LTF1625FS830	✓
193	I	✓	80	5000	S/W	-	31002	25835	■	LTF1624FS850	✓
193	I	✓	80	4000	S/W	-	31476	26230	■	LTF1624FS840	✓
193	I	✓	80	3000	S/W	-	29292	24410	■	LTF1624FS830	✓
175	I	✓	80	5000	S/W	-	28032	23360	■	LTF1623FS850	✓
175	I	✓	80	4000	S/W	-	28602	23835	■	LTF1623FS840	✓
175	I	✓	80	3000	S/W	-	26598	22165	■	LTF1623FS830	✓
153	I	✓	80	5000	S/W	-	26388	21990	■	LTF1622FS850	✓
153	I	✓	80	4000	S/W	-	26928	22440	■	LTF1622FS840	✓
153	I	✓	80	3000	S/W	-	24906	20755	■	LTF1622FS830	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

212	I	✓	80	5000	S/W	-	32622	27185	■	LTF1625DS850	✓
212	I	✓	80	4000	S/W	-	33288	27740	■	LTF1625DS840	✓
212	I	✓	80	3000	S/W	-	30960	25800	■	LTF1625DS830	✓
193	I	✓	80	5000	S/W	-	31002	25835	■	LTF1624DS850	✓
193	I	✓	80	4000	S/W	-	31476	26230	■	LTF1624DS840	✓
193	I	✓	80	3000	S/W	-	29292	24410	■	LTF1624DS830	✓
175	I	✓	80	5000	S/W	-	28032	23360	■	LTF1623DS850	✓
175	I	✓	80	4000	S/W	-	28602	23835	■	LTF1623DS840	✓
175	I	✓	80	3000	S/W	-	26598	22165	■	LTF1623DS830	✓
153	I	✓	80	5000	S/W	-	26388	21990	■	LTF1622DS850	✓
153	I	✓	80	4000	S/W	-	26928	22440	■	LTF1622DS840	✓
153	I	✓	80	3000	S/W	-	24906	20755	■	LTF1622DS830	✓



Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
GUELL 2.5+			
Louvre GUELL 2.5+		LTF1A3652	✓
Protective grid GUELL 2.5+		LTF1A5603	✓
Steel 'U' bolt clamp for Ø 60-80 mm poles painted aluminium grey		14012294	✓
Single pole top support GUELL 2.5		310966	✓
Double pole top support GUELL 2.5		310967	✓




LTF1A3652



14012294



310966



310967