



# HALL LED ESSENTIAL CEILING

Ideal for residential and hospitality applications

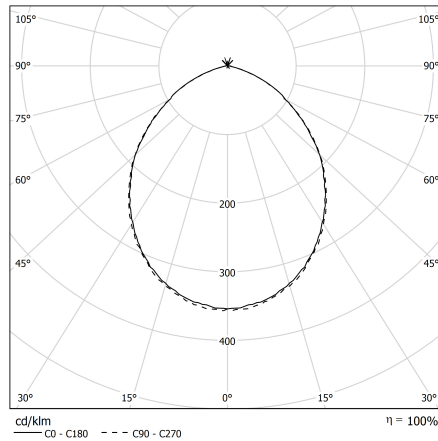

CODE		FLUX	SIZE	CERTIFICATIONS
28PG15L390EM	15W 90° 3000K	1242lm	Ø 204mm	CE IP44 A

## Optic

Polycarbonate frosted diffuser.  
90° beam angle.  
CUT OFF > 10°.

## Specifications

SMD LED technology;  
Integrated driver;  
CRI>90;  
Mac Adams 3;  
Life Time: L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009

## Body

Polycarbonate body and die-cast aluminum heat sink.

## Legal Reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## Wiring

EM: Built-in wiring 230-240V/50-60Hz with power factor >0.97 with 1h emergency block.