

HALL LED ESSENTIAL




ID CODE: 38

HALL LED ESSENTIAL is perfect for retrofit applications where price and efficacy are of equal importance. Available in two diameters to directly replace 18W and 26W compact fluorescent fixtures.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR < 19
-  IP 54 (from the front)





LED

-  3000K/4000K
-  >105 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Bluetooth - BT code (verify the version)
-  Emergency kit 1/3 hour EM/EM 3h code
-  2700K - 5000K

Specifications · SMD LED technology
· Driver included

Optic Microcell polycarbonate internal reflector and opal microprism polycarbonate diffuser. CUT OFF > 10°.

Body Polycarbonate body and die-cast aluminum heat sink.



Colour ○ White RAL 9003 matt - Code: B



HALL LED ESSENTIAL MEDIUM

OPTIC

Microcell polycarbonate internal reflector and opal micropism polycarbonate diffuser UGR<19.
CUT OFF > 10°.

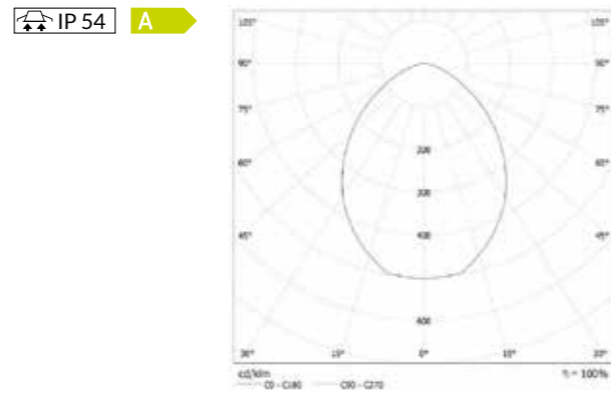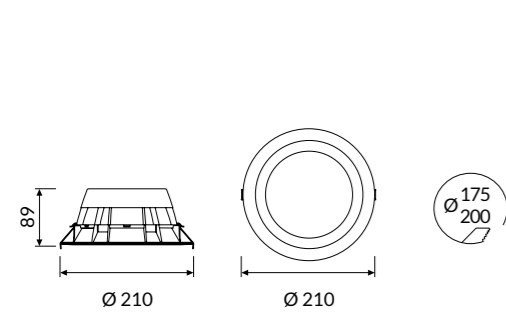



COLOUR TEMPERATURE			4000K	3000K
COD	💡	lm		
38MP9L490M54	9W	1400		
38MP14L490M54	14W	2100		
38MP20L490M54	20W	2700		

COD	💡	lm
38MP9L390M54	9W	1330
38MP14L390M54	14W	2080
38MP20L390M54	20W	2680

HALL LED ESSENTIAL LARGE

OPTIC

Microcell polycarbonate internal reflector and opal micropism polycarbonate diffuser UGR<19.
CUT OFF > 10°.

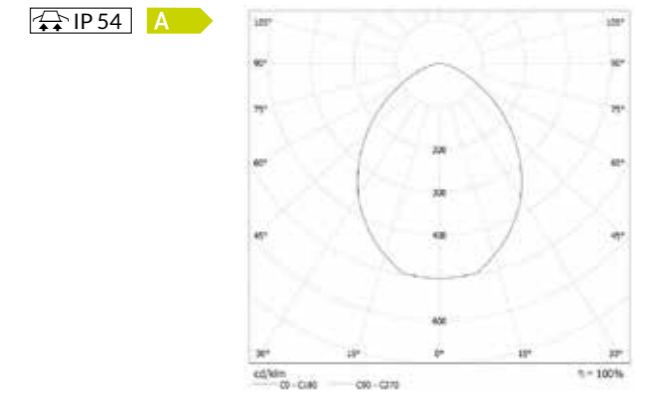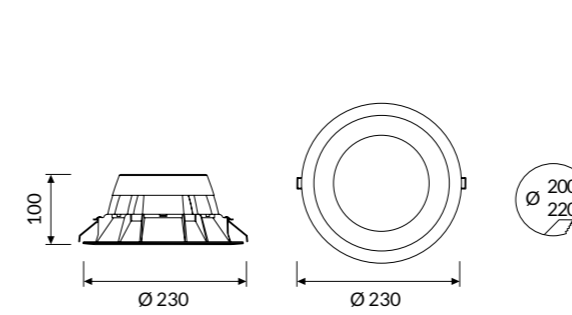

COLOUR TEMPERATURE			4000K	3000K
COD	💡	lm		
38MP9L490L54	9W	1400		
38MP14L490L54	14W	2100		
38MP20L490L54	20W	2700		

COD	💡	lm
38MP9L390L54	9W	1330
38MP14L390L54	14W	2080
38MP20L390L54	20W	2680