

LAMA+ MINI

design by ROBERTO FIORATO




- Suspended LED fixture series for indoors, made up of:
- Housing and cap in die-cast aluminium with polyester powder coating after surface chemical conversion treatment
 - Flat extra clear tempered glass diffuser
 - High-transparency polycarbonate lenses for best light transmission
 - Anti-ageing silicone gasket with high resiliency
 - Electrical connection with outdoor rated plug & socket quick connector (IP66) that allows connection to mains without opening the luminaire. Made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm
 - Galvanised steel suspension hooks

- Stainless steel external screws
- Stainless steel locking springs for the glass
- EM versions are complete with emergency device that can operate on battery for 1 hour. Product can be used for general or emergency lighting.
- Versions are available with ON-OFF driver and dimmable DALI



○ WH-87 / White / Textured




Please visit our web site
www.performanceinlighting.com
 for the latest updated versions available.

INDUSTRIAL

LAMA+ MINI S/W

IK06 1J xx3

| WATTAGE | CLASS | CEC | CRI | KELVIN | COS ϕ $\geq 0,9$ | OPTIC | OPTIC BEAM | LIGHTSOURCE LUMEN OUTPUT | LUMINAIRE LUMEN OUTPUT | L | B | LIFETIME | COLOUR/ RAL | PART NUMBER |
|-------------------------------------|-------|-----|-----|--------|--------------------------|-------|------------|-----------------------------|---------------------------|----|----|----------|----------------|----------------|
| Power LED 220-240 V 50/60 Hz | | | | | | | | | | | | | | |
| 101 W | I | - | 80 | 4000 | ✓ | S/W | - | 16272 lm | 12084 lm | 70 | 10 | 60000 h | ○ | 3101184 |
| 72 W | I | - | 80 | 4000 | ✓ | S/W | - | 12204 lm | 9233 lm | 70 | 10 | 60000 h | ○ | 3101185 |
| 52 W | I | - | 80 | 4000 | ✓ | S/W | - | 8064 lm | 6117 lm | 70 | 10 | 60000 h | ○ | 3101186 |
| 39 W | I | - | 80 | 4000 | ✓ | S/W | - | 6048 lm | 4725 lm | 70 | 10 | 60000 h | ○ | 3101187 |

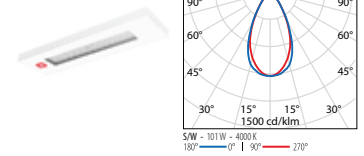


Power LED - dimmable DALI 220-240 V 50/60 Hz

| | | | | | | | | | | | | | | |
|-------|---|---|----|------|---|-----|---|----------|----------|----|----|---------|---|----------------|
| 101 W | I | - | 80 | 4000 | ✓ | S/W | - | 16272 lm | 12084 lm | 70 | 10 | 60000 h | ○ | 3101192 |
| 72 W | I | - | 80 | 4000 | ✓ | S/W | - | 12204 lm | 9233 lm | 70 | 10 | 60000 h | ○ | 3101193 |
| 52 W | I | - | 80 | 4000 | ✓ | S/W | - | 8064 lm | 6117 lm | 70 | 10 | 60000 h | ○ | 3101194 |
| 39 W | I | - | 80 | 4000 | ✓ | S/W | - | 6048 lm | 4725 lm | 70 | 10 | 60000 h | ○ | 3101195 |

LAMA+ MINI S/W EM

IK06 1J xx3


| WATTAGE | CLASS | CEC | CRI | KELVIN | COS ϕ $\geq 0,9$ | OPTIC | OPTIC BEAM | LIGHTSOURCE LUMEN OUTPUT | LUMINAIRE LUMEN OUTPUT | L | B | LIFETIME | COLOUR/ RAL | PART NUMBER |
|--|-------|-----|-----|--------|--------------------------|-------|------------|-----------------------------|---------------------------|----|----|----------|----------------|----------------|
| Power LED - emergency 1h - 220-240 V 50/60 Hz | | | | | | | | | | | | | | |
| 52 W | I | - | 80 | 4000 | ✓ | S/W | - | 8064 lm | 6117 lm | 70 | 10 | 60000 h | ○ | 3101750 |
| 39 W | I | - | 80 | 4000 | ✓ | S/W | - | 6048 lm | 4725 lm | 70 | 10 | 60000 h | ○ | 3101751 |

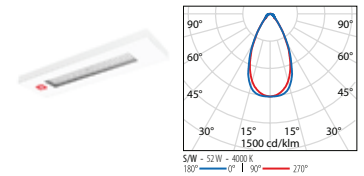

LAMA+ MINI S/EW

IK06 1J xx3

| WATTAGE | CLASS | CEC | CRI | KELVIN | COS ϕ $\geq 0,9$ | OPTIC | OPTIC BEAM | LIGHTSOURCE LUMEN OUTPUT | LUMINAIRE LUMEN OUTPUT | L | B | LIFETIME | COLOUR/ RAL | PART NUMBER |
|-------------------------------------|-------|-----|-----|--------|--------------------------|-------|------------|-----------------------------|---------------------------|----|----|----------|----------------|----------------|
| Power LED 220-240 V 50/60 Hz | | | | | | | | | | | | | | |
| 101 W | I | - | 80 | 4000 | ✓ | S/EW | - | 16272 lm | 12775 lm | 70 | 10 | 60000 h | ○ | 3101188 |
| 72 W | I | - | 80 | 4000 | ✓ | S/EW | - | 12204 lm | 9805 lm | 70 | 10 | 60000 h | ○ | 3101189 |
| 52 W | I | - | 80 | 4000 | ✓ | S/EW | - | 8064 lm | 6454 lm | 70 | 10 | 60000 h | ○ | 3101190 |
| 39 W | I | - | 80 | 4000 | ✓ | S/EW | - | 6048 lm | 4988 lm | 70 | 10 | 60000 h | ○ | 3101191 |

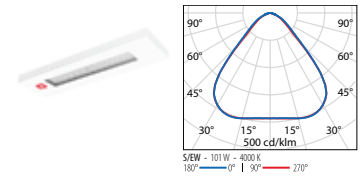








Power LED - dimmable DALI 220-240 V 50/60 Hz

| | | | | | | | | | | | | | | |
|-------|---|---|----|------|---|------|---|----------|----------|----|----|---------|---|----------------|
| 101 W | I | - | 80 | 4000 | ✓ | S/EW | - | 16272 lm | 12775 lm | 70 | 10 | 60000 h | ○ | 3101196 |
| 72 W | I | - | 80 | 4000 | ✓ | S/EW | - | 12204 lm | 9805 lm | 70 | 10 | 60000 h | ○ | 3101197 |
| 52 W | I | - | 80 | 4000 | ✓ | S/EW | - | 8064 lm | 6454 lm | 70 | 10 | 60000 h | ○ | 3101198 |
| 39 W | I | - | 80 | 4000 | ✓ | S/EW | - | 6048 lm | 4988 lm | 70 | 10 | 60000 h | ○ | 3101199 |

LAMA+ MINI S/EW EM

IK06 1J xx3

| WATTAGE | CLASS | CEC | CRI | KELVIN | COS ϕ $\geq 0,9$ | OPTIC | OPTIC BEAM | LIGHTSOURCE LUMEN OUTPUT | LUMINAIRE LUMEN OUTPUT | L | B | LIFETIME | COLOUR/ RAL | PART NUMBER |
|--|-------|-----|-----|--------|--------------------------|-------|------------|-----------------------------|---------------------------|----|----|----------|----------------|----------------|
| Power LED - emergency 1h - 220-240 V 50/60 Hz | | | | | | | | | | | | | | |
| 52 W | I | - | 80 | 4000 | ✓ | S/EW | - | 8064 lm | 6454 lm | 70 | 10 | 60000 h | ○ | 3101754 |
| 39 W | I | - | 80 | 4000 | ✓ | S/EW | - | 6048 lm | 4988 lm | 70 | 10 | 60000 h | ○ | 3101755 |

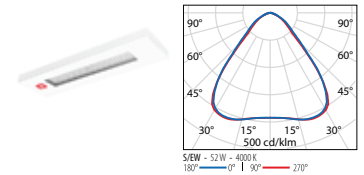

H07RN-F 3G1,5 mm

H07RN-F 5G1÷1,5

