

LM4




Range of indoor and outdoor LED fixtures, comprising:

- Housing and cap in die-cast aluminium with polyester powder coating after surface chemical conversion treatment
- Diffuser made of extra clear, flat glass, tempered, markings with serigraphy, internally ice etched
- Anti-ageing silicone gasket with high resiliency
- Electrical connection with outdoor rated plug & socket quick connector (IP66) that allows connection to mains without opening the luminaire. Made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm

- Stainless steel external screws
- Stainless steel locking springs for the glass
- 3000 K and 5000 K available upon request
- EM versions are complete with emergency device that can operate on battery for 1 hour. Product can be used for general or emergency lighting.
- Versions are available with ON-OFF driver and dimmable DALI
- Through-wiring version available upon request



● GR-94 / Metallic grey / Textured



Please visit our web site
www.performanceinlighting.com
 for the latest updated versions available.

LM4 S/EW

IK06 0.80J xx3


WATTAGE	CLASS	CRI	KELVIN	COS Ø	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
---------	-------	-----	--------	-------	-------	------------	--------------------------	------------------------	---	---	----------	-------------	-------------

Power LED 220-240 V 50/60 Hz

101 W	I	-	80	4000	✓	S/EW	-	16272 lm	12213 lm	70	10	60000 h	● 3101704
72 W	I	-	80	4000	✓	S/EW	-	12204 lm	9464 lm	70	10	60000 h	● 3101705
52 W	I	-	80	4000	✓	S/EW	-	8064 lm	6543 lm	70	10	60000 h	● 3101706
39 W	I	-	80	4000	✓	S/EW	-	6048 lm	4818 lm	70	10	60000 h	● 3101707

Power LED - dimmable DALI 220-240 V 50/60 Hz

101 W	I	-	80	4000	✓	S/EW	-	16272 lm	12213 lm	70	10	60000 h	● 3101708
72 W	I	-	80	4000	✓	S/EW	-	12204 lm	9464 lm	70	10	60000 h	● 3101709
52 W	I	-	80	4000	✓	S/EW	-	8064 lm	6543 lm	70	10	60000 h	● 3101710
39 W	I	-	80	4000	✓	S/EW	-	6048 lm	4818 lm	70	10	60000 h	● 3101711

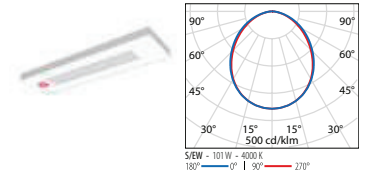


LM4 S/EW EM

IK06 0.80J xx3

WATTAGE	CLASS	CRI	KELVIN	COS Ø	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
---------	-------	-----	--------	-------	-------	------------	--------------------------	------------------------	---	---	----------	-------------	-------------

Power LED - emergency 1h - 220-240 V 50/60 Hz


52 W	I	-	80	4000	✓	S/EW	-	8064 lm	6543 lm	70	10	60000 h	● 3101714
39 W	I	-	80	4000	✓	S/EW	-	6048 lm	4818 lm	70	10	60000 h	● 3101715

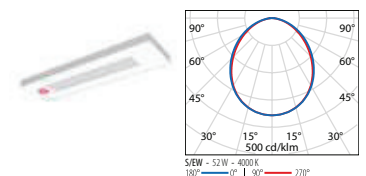

max 4,2 kg



Max 0,11 m²



Max 0,041 m²



Max 0,0085 m²