


MASK+ ROUND




Part number	3105007
Lampholder:	LED
Light Source:	LED
Wattage:	22 W
Finish:	AN-96 / Anthracite gray / Textured
Insulation class:	I
Degree of protection:	IP65
IK-J-xxIP:	IK06 1J xx3
CRI:	80
Kelvin:	4000
Power factor:	$\text{COS}\phi \geq 0,9$
Optic:	Symmetric extra wide reflector
Lightsource lumen output:	2650 lm
Luminaire lumen output:	1227 lm
L:	L70
B:	B10
Lifetime:	54000 h
Ta MIN luminaire:	-20°
Ta MAX luminaire:	35°

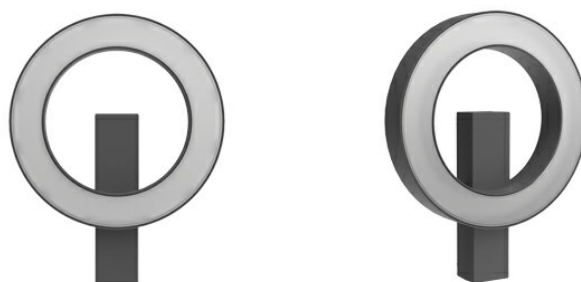

Description

- Wall and ceiling mounting luminaire for indoor and outdoor, comprising:
- ISO 9227 painted die-cast aluminium housing
 - Painted die cast aluminium base for wall and ceiling applications
 - Glass diffusers, internally painted for homogeneous diffused light
 - Mains voltage 220-240V 50/60Hz LED module protected against surges up to 500 V
 - Silicone gasket
 - Chromed steel spring locks for quick attachment of the body to the housing
 - PIR versions have a motion sensor fitted into the ring, suitable for resistive and inductive load
 - Built-in photocell set from 10 to 2000 lux
 - 120° aperture angle
 - Adjustable operation time (10 s to 7 min)
 - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08
 - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Photometric data



Technical drawings

