

MIMIK 10




Series of wall and ceiling mounting LED luminaires for indoor and outdoor use, comprising:

- Polyester powder coated die-cast aluminium housing
- Powder polyester painting process optimized against UV rays in 13 different steps
- Silicone gasket
- LED versions include 220/240 V 50/60 Hz safety transformer

- Available in single (M) and dual (B) emission versions
- The MIMIK versions are available with asymmetric (CP) beam lenses, or with narrow beam (C/I) circular lenses. In the twin emission versions (B), the two different beam types can be combined (CP+C/I, C/I+C/I).
- "CP" versions feature asymmetric light distribution suitable for bicycle and pedestrian pathways



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured




Please visit our web site
www.performanceinlighting.com
 for the latest updated versions available.

MIMIK 10 FLAT M

IK06 1J xx3


WATTAGE	CLASS		CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
5 W	I	✓	80	4000	✓	A/W	-	700 lm	473 lm	80	10	60000 h	●	304827
5 W	I	✓	80	3000	✓	A/W	-	650 lm	451 lm	80	10	60000 h	●	304824
5 W	I	✓	80	4000	✓	A/W	-	700 lm	473 lm	80	10	60000 h	●	304826
5 W	I	✓	80	3000	✓	A/W	-	650 lm	451 lm	80	10	60000 h	●	304823
5 W	I	✓	80	4000	✓	A/W	-	700 lm	473 lm	80	10	60000 h	○	304828
5 W	I	✓	80	3000	✓	A/W	-	650 lm	451 lm	80	10	60000 h	○	304825

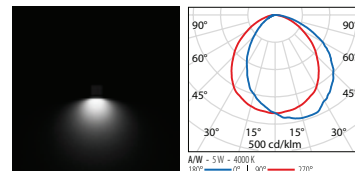

MIMIK 10 FLAT B

IK06 1J xx3


WATTAGE	CLASS		CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
10 W	I	✓	80	4000	✓	A/W	-	1357 lm	925 lm	80	10	60000 h	●	304833
10 W	I	✓	80	3000	✓	A/W	-	1140 lm	880 lm	80	10	60000 h	●	304830
10 W	I	✓	80	4000	✓	A/W	-	1357 lm	925 lm	80	10	60000 h	●	304832
10 W	I	✓	80	3000	✓	A/W	-	1140 lm	880 lm	80	10	60000 h	●	304829
10 W	I	✓	80	4000	✓	A/W	-	1357 lm	925 lm	80	10	60000 h	○	304834
10 W	I	✓	80	3000	✓	A/W	-	1140 lm	880 lm	80	10	60000 h	○	304831

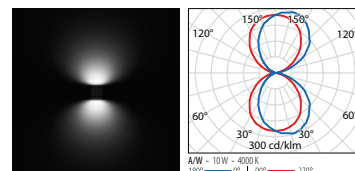

MIMIK 10 M C/I

IK05 0.70J xx3


WATTAGE	CLASS		CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
5 W	I	✓	70	4000	✓	C/I	20°	593 lm	432 lm	80	10	60000 h	●	304851
5 W	I	✓	70	3000	✓	C/I	20°	561 lm	379 lm	80	10	60000 h	●	304848
5 W	I	✓	70	4000	✓	C/I	20°	593 lm	432 lm	80	10	60000 h	●	304850
5 W	I	✓	70	3000	✓	C/I	20°	561 lm	379 lm	80	10	60000 h	●	304847
5 W	I	✓	70	4000	✓	C/I	20°	593 lm	432 lm	80	10	60000 h	○	304852
5 W	I	✓	70	3000	✓	C/I	20°	561 lm	379 lm	80	10	60000 h	○	304849

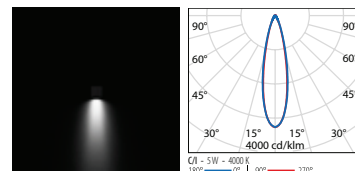

MIMIK 10 B C/I

IK05 0.70J xx3


WATTAGE	CLASS		CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
10 W	I	✓	70	4000	✓	C/I	20°	1120 lm	888 lm	80	10	60000 h	●	304863
10 W	I	✓	70	3000	✓	C/I	20°	1040 lm	779 lm	80	10	60000 h	●	304860
10 W	I	✓	70	4000	✓	C/I	20°	1120 lm	888 lm	80	10	60000 h	●	304862
10 W	I	✓	70	3000	✓	C/I	20°	1040 lm	779 lm	80	10	60000 h	●	304859
10 W	I	✓	70	4000	✓	C/I	20°	1120 lm	888 lm	80	10	60000 h	○	304864
10 W	I	✓	70	3000	✓	C/I	20°	1040 lm	779 lm	80	10	60000 h	○	304861

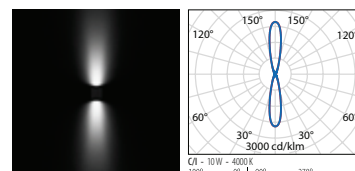

MIMIK 10 M CP/T3

IK05 0.70J xx3

WATTAGE	CLASS		CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
5 W	I	✓	70	4000	✓	CP/T3	-	593 lm	358 lm	80	10	60000 h	●	304857
5 W	I	✓	70	3000	✓	CP/T3	-	561 lm	314 lm	80	10	60000 h	●	304854
5 W	I	✓	70	4000	✓	CP/T3	-	593 lm	358 lm	80	10	60000 h	●	304856
5 W	I	✓	70	3000	✓	CP/T3	-	561 lm	314 lm	80	10	60000 h	●	304853
5 W	I	✓	70	4000	✓	CP/T3	-	593 lm	358 lm	80	10	60000 h	○	304858
5 W	I	✓	70	3000	✓	CP/T3	-	561 lm	314 lm	80	10	60000 h	○	304855

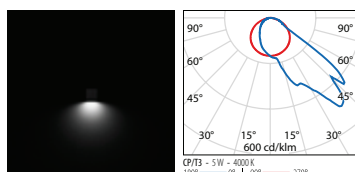

MIMIK 10 B CP/T3+C/I

IK05 0.70J xx3

WATTAGE	CLASS		CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
10 W	I	✓	70	4000	✓	-	-	1120 lm	806 lm	80	10	60000 h	●	304869
10 W	I	✓	70	3000	✓	-	-	1040 lm	707 lm	80	10	60000 h	●	304866
10 W	I	✓	70	4000	✓	-	-	1120 lm	806 lm	80	10	60000 h	●	304868
10 W	I	✓	70	3000	✓	-	-	1040 lm	707 lm	80	10	60000 h	●	304865
10 W	I	✓	70	4000	✓	-	-	1120 lm	806 lm	80	10	60000 h	○	304870
10 W	I	✓	70	3000	✓	-	-	1040 lm	707 lm	80	10	60000 h	○	304867

