

MIMIK 10 POST




Landscaping LED bollard luminaire comprising:

- Painted die-cast aluminium housing and cover
- Tempered glass diffuser, printed
- Reflector in satin finish pure aluminium (Al 99.98)
- Silicone gasket
- External electrical connection with sealed plug-socket QUICK, complete with cable


- Standard power supply already included
- Stainless steel locking screws
- Painted extruded aluminium pole
- Base plate included
- Complying with the recommendations for glare control and upward light pollution




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

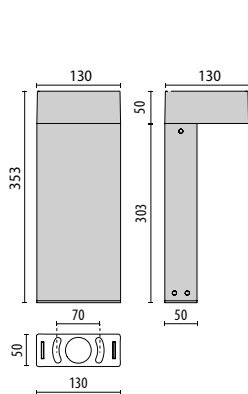

MIMIK 10 POST
300

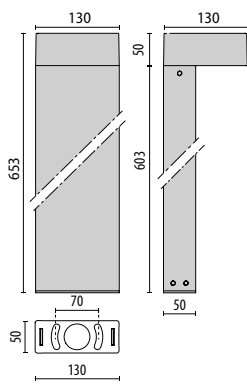

MIMIK 10 POST
600

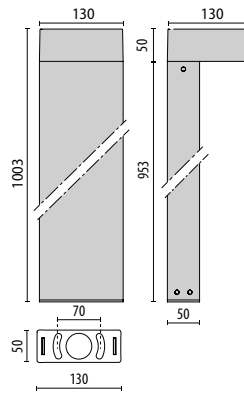

MIMIK 10 POST
1000




Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.

MIMIK 10 POST 300

IK08 5J xx5


WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
11 W	I	✓	80	4000	✓	A/I	-	1075 lm	915 lm	80	10	60000 h	●	304619
11 W	I	✓	80	3000	✓	A/I	-	1006 lm	745 lm	80	10	60000 h	●	304617
11 W	I	✓	80	4000	✓	A/I	-	1075 lm	915 lm	80	10	60000 h	●	304620
11 W	I	✓	80	3000	✓	A/I	-	1006 lm	745 lm	80	10	60000 h	●	304618



MIMIK 10 POST 600

IK08 5J xx5


WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
11 W	I	✓	80	4000	✓	A/I	-	1075 lm	915 lm	80	10	60000 h	●	304615
11 W	I	✓	80	3000	✓	A/I	-	1006 lm	745 lm	80	10	60000 h	●	304613
11 W	I	✓	80	4000	✓	A/I	-	1075 lm	915 lm	80	10	60000 h	●	304616
11 W	I	✓	80	3000	✓	A/I	-	1006 lm	745 lm	80	10	60000 h	●	304614



MIMIK 10 POST 1000

IK08 5J xx5

WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
10 W	I	✓	70	4000	✓	CP/T3	-	1076 lm	762 lm	80	10	60000 h	●	306555
10 W	I	✓	70	3000	✓	CP/T3	-	1000 lm	719 lm	80	10	60000 h	●	306554
10 W	I	✓	70	4000	✓	CP/T3	-	1076 lm	762 lm	80	10	60000 h	●	306553
10 W	I	✓	70	3000	✓	CP/T3	-	1000 lm	719 lm	80	10	60000 h	●	306552



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
MIMIK 10 POST		
Connection Kit Y 3-way D.7-10.5mm IP68		310496



310496