


MIMIK 10 POST 300




Part number	304619
Lampholder:	LED
Light Source:	LED
Wattage:	11 W
Finish:	GR-94 / Metallic grey / Textured
Insulation class:	I
Degree of protection:	IP65
IK-J-xxIP:	IK08 5J xx5
CRI:	80
Kelvin:	4000
Power factor:	$\cos\phi \geq 0,9$
Optic:	ASYMMETRIC INTENSIVE REFLECTOR
Lightsource lumen output:	1075 lm
Luminaire lumen output:	915 lm
L:	L80
B:	B10
Lifetime:	60000 h
Ta MIN luminaire:	-25°
Ta MAX luminaire:	35°
ULR:	0%

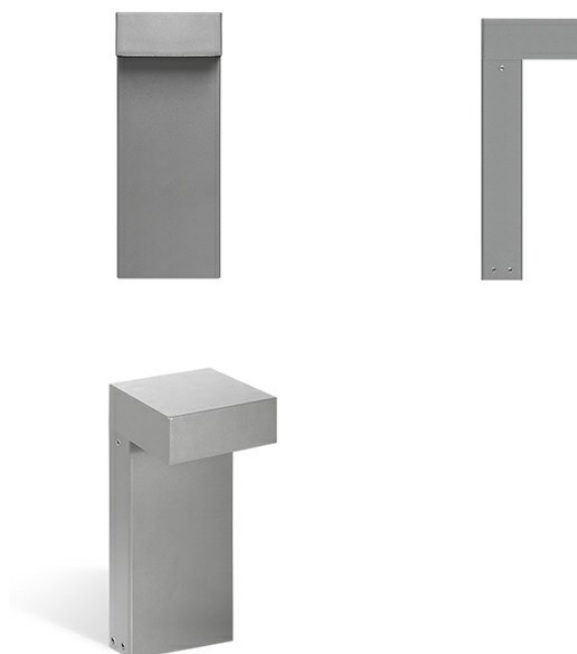


Description

- Landscaping LED bollard luminaire comprising:
- Painted die-cast aluminium housing and cover
 - Painted extruded aluminium pole
 - Powder polyester painting process optimized against UV rays in 13 different steps
 - Tempered glass diffuser, printed
 - Reflector in satin finish pure aluminium (Al 99.98)
 - Silicone gasket
 - Stainless steel locking screws
 - External electrical connection with sealed plug-socket QUICK, complete with cable
 - Base plate included
 - Complying with the recommendations for glare control and upward light pollution
 - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Photometric data



Technical drawings



OPTIONAL ACCESSORIES

MIMIK 10 POST



310496

Connection Kit Y 3-way D.7-10.5mm

IP68