

MULTI+ 40 PC

Part number 304140



Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing
- Technopolymer vandal-proof opal diffuser, 960°C glow wire test rated
- Class II
- Anti-ageing custom moulded silicone sealing gasket(s)
- Through-wiring designed
- Stainless steel, anti-tampering locking screws
- Max 20 mm diameter for cable/conduit entry
- Integral, tiltable, self-heat dissipating, Metal-Core SMD LED board (future proof)
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Product data

| | | | |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC002892 |
|-------------|----------|-------------|----------|

General information

| | | | |
|--------------------------------|--------------------------|------------------------------|----------------------|
| Lampholder: | LED | Light source: | LED |
| Lightsource lumen output [lm]: | 3017 | Luminaire lumen output [lm]: | 1464 |
| Luminaire wattage [W]: | 19,5 W | Luminous efficacy [lm/W]: | 75 |
| CRI: | 80 | Colour temperature [K]: | 3000 |
| Colour / Finishing: | WH-87 / White / Textured | IP degree of protection: | IP65 |
| IK-J-xxIP: | IK10 20J xxg | Optic: | Symmetric Extra-Wide |
| Net weight [kg]: | 2.023 | Overall diameter [mm]: | 420 |
| Overall width [mm]: | 85 | | |

Mechanical features

| | | | |
|---------------------|----------------|----------------------|---------|
| Shape: | ROUND > 300 MM | Housing material: | Plastic |
| Diffuser material: | PLASTIC | Glow wire test [°C]: | 750 °C |
| Anti-vandal screws: | | | |

Electrical features

| | | | |
|---------------------------|---------|---------------------------------|---------|
| Voltage type: | AC/DC | Input voltage [V AC]: | 220/240 |
| Input frequency [Hz]: | 0/50/60 | Power factor / COS Φ: | >0.9 |
| Input voltage [V DC]: | 170/280 | Surge protection Common [kV]: | 4.0 |
| Inrush current [A/μs]: | 5 / 50 | C10 1.5 mm ² : | 52 |
| C16 2.5 mm ² : | 85 | B10 1.5 mm ² : | 31 |
| B16 2.5 mm ² : | 50 | | |


Installation

| | | | |
|--------------------------------|---------|--------------------------------|-----------|
| Application area: | Outdoor | Mounting type: | Bulkheads |
| Min. ambient temperature [°C]: | -20 | Max. ambient temperature [°C]: | 30 |

Light features


| | | | |
|---------------------------------|--------|--------------------|--------------|
| MacAdam: | 3 | Lumen maintenance: | L80B10@6000h |
| Distribution of light emission: | Direct | | |

Photometric data

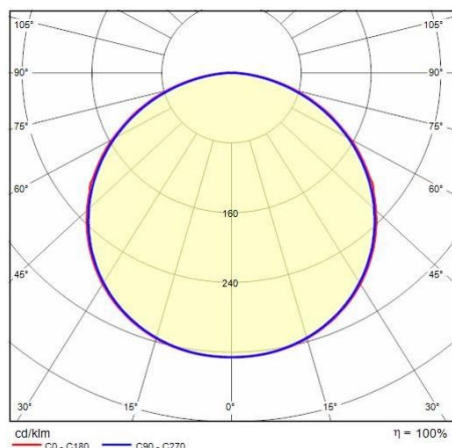

Optional accessories

MULTI+ 40 PC



310514

Tool TORX