

NIKKO+45

design by ROBERTO FIORATO




Wall, ceiling, bracket and post mounted luminaire for indoor and outdoor lighting, comprising:

- Die-cast painted aluminium housing, ring and screens
- Pressed glass diffuser, white painted inside, secured with the ring
- Reflector and components bracket made of aluminium

- Foam silicone gasket
- Stainless steel locking screws
- DA versions are dual power switch versions, designed with two drivers arranged in parallel. Requires two separate lines



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

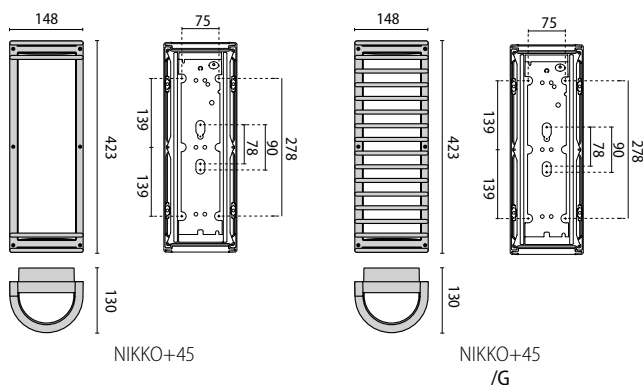

Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.

GENERAL OUTDOOR

NIKKO+45 LED DA



IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	15 W	I	-	80	4000	✓	S/EW	-	1540 lm	1013 lm	80	10	50000 h		303115
LED	15 W	I	-	80	3000	✓	S/EW	-	1086 lm	843 lm	80	10	50000 h		303103
LED	15 W	I	-	80	4000	✓	S/EW	-	1540 lm	1013 lm	80	10	50000 h		303116
LED	15 W	I	-	80	3000	✓	S/EW	-	1086 lm	843 lm	80	10	50000 h		303104
LED	15 W	I	-	80	4000	✓	S/EW	-	1540 lm	1013 lm	80	10	50000 h		303114
LED	15 W	I	-	80	3000	✓	S/EW	-	1086 lm	843 lm	80	10	50000 h		303102

NIKKO+45

IK06 1J xx3


LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
E27	2x40 W	I	✓	-	-	-	S/EW	-	-	-	-	-	●	002076
E27	2x40 W	I	✓	-	-	-	S/EW	-	-	-	-	-	●	002077
E27	2x40 W	I	✓	-	-	-	S/EW	-	-	-	-	-	○	002075



NIKKO+45/G LED DA

IK06 1J xx3


LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	15 W	I	-	80	4000	✓	S/EW	-	1540 lm	766 lm	80	10	50000 h	● 303119
LED	15 W	I	-	80	3000	✓	S/EW	-	1086 lm	641 lm	80	10	50000 h	● 303107
LED	15 W	I	-	80	4000	✓	S/EW	-	1540 lm	766 lm	80	10	50000 h	● 303120
LED	15 W	I	-	80	3000	✓	S/EW	-	1086 lm	641 lm	80	10	50000 h	● 303108
LED	15 W	I	-	80	4000	✓	S/EW	-	1540 lm	766 lm	80	10	50000 h	○ 303118
LED	15 W	I	-	80	3000	✓	S/EW	-	1086 lm	641 lm	80	10	50000 h	○ 303106



NIKKO+45/G

IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
E27	2x40 W	I	✓	-	-	-	S/EW	-	-	-	-	-	-		002097
E27	2x40 W	I	✓	-	-	-	S/EW	-	-	-	-	-	-		002098
E27	2x40 W	I	✓	-	-	-	S/EW	-	-	-	-	-	-		002095



OPTIONAL ACCESSORIES


Bracket suitable for single or twin (back to back) luminaire mounting, comprising:

- Support in painted extruded aluminium
- Wall mounting bracket with simple fix installation system, in painted die-cast aluminium

Post comprising:

- Painted extruded aluminium post, suitable for single or twin (back to back) luminaire mounting.
- Painted die-cast aluminium base plate
- Die-cast aluminium junction box with a 4-pole 4 mm² terminal suitable for loop in wiring connection.

DESCRIPTION	COLOR	PART NUMBER
NIKKO+45		
Wall bracket 45	○	000440
Wall bracket 45	●	000441
Wall bracket 45	●	000442
Post 45 H410	○	000444
Post 45 H410	●	000445
Post 45 H410	●	000446
Post 45 H800	○	000448
Post 45 H800	●	000449
Post 45 H800	●	000450
Post 45 H1200	○	000452
Post 45 H1200	●	000453
Post 45 H1200	●	000454



Complete unit

1A+1B = please order 2 codes

2A+1B = please order 3 codes

COMPONENTS
A luminaire
B pole




B A

Complete unit



1A+1B = please order 2 codes

2A+1B = please order 3 codes

COMPONENTS
A luminaire
B bracket



000440
000441
000442

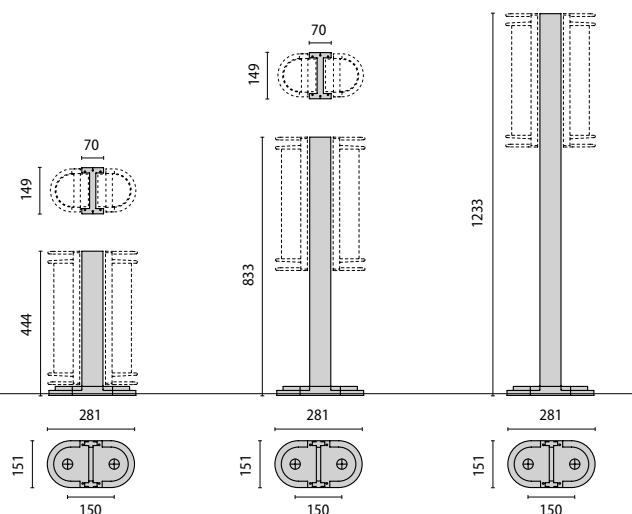

000444
000445
000446

000448
000449
000450

000452
000453
000454