



NORMA+

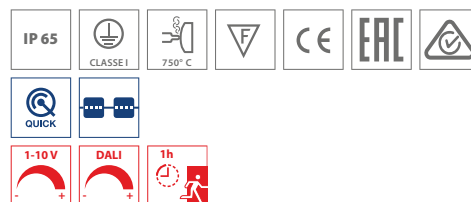


● GR-RAL7035 / Grey RAL7035 / Matt


- Weatherproof luminaire with LED light source, comprising:
- UV stabilised co-extruded polycarbonate body with double finish; satin-finish for the optical compartment and matt finish for the auxiliary electrical compartment.
- Technopolymers end caps
- Anti-ageing silicone gasket
- Polycarbonate bushing for the power connection with bayonet opening without utensils.
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Light beam obtained by the combination of multiple LED modules
- Aluminium heat dissipation system
- Stainless steel springs for quick ceiling mount
- Supplied with anti-vacuum valve
- EM versions are complete with emergency device that can operate on battery for 1 hour. Product can be used for general or emergency lighting.
- The NORMA+ CL versions are complete with through wiring for continuous line installation
- Versions with dimmable 1-10 V or DALI drivers are available




NORMA+
60



NORMA+
120




NORMA+
150



NORMA+
60 CL



NORMA+
120 CL



NORMA+
150 CL

Ceiling surface mounted


Suspended



UV stabilised coextruded polycarbonate body with double finish; satin-finish for the optical compartment and matt finish for the auxiliary electrical compartment.



Product generates only minimal quantity of heat.




100% light uniformity.



Supplied with anti-vacuum valve. (NORMA+)




Push wire terminals.




Pair of fast fit strong AISI 304 stainless steel brackets.


Easy installation

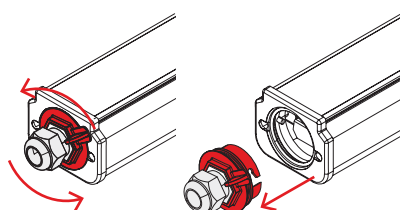

Open

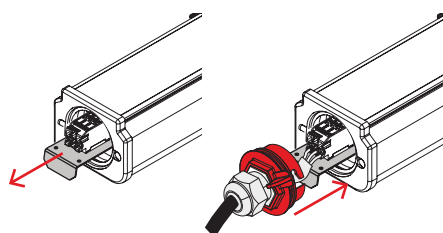

Fast connection



Close


Continuous mounted luminaire


Through wiring connection




Max 100 m / Max 16 A


NORMA+ 60

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	27 W	I		80	4000	•	S/EW	-	4077 lm	3258 lm	80	10	44000 h	●	305949
LED	18 W	I		80	4000	•	S/EW	-	2718 lm	2246 lm	80	10	44000 h	●	305948





NORMA+ 120

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	45 W	I		80	4000	•	S/EW	-	6795 lm	5215 lm	80	10	44000 h	●	305952
LED	34 W	I		80	4000	•	S/EW	-	5134 lm	3932 lm	80	10	44000 h	●	305951
LED	25 W	I		80	4000	•	S/EW	-	3775 lm	3002 lm	80	10	44000 h	●	305950





NORMA+ 150

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	68 W	I		80	4000	•	S/EW	-	10268 lm	8395 lm	80	10	44000 h	●	305955
LED	60 W	I		80	4000	•	S/EW	-	9060 lm	7556 lm	80	10	44000 h	●	305954
LED	35 W	I		80	4000	•	S/EW	-	5285 lm	4355 lm	80	10	44000 h	●	305953



NORMA+ 60 CL

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	27 W	I		80	4000	•	S/EW	-	4077 lm	3258 lm	80	10	44000 h	●	305941
LED	18 W	I		80	4000	•	S/EW	-	2718 lm	2246 lm	80	10	44000 h	●	305940




Power LED dimmable 1-10 V 220-240 V 50/60 Hz


LED	27 W	I		80	4000	•	S/EW	-	4077 lm	3258 lm	80	10	44000 h	●	306160
LED	18 W	I		80	4000	•	S/EW	-	2718 lm	2246 lm	80	10	44000 h	●	306159

Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	27 W	I		80	4000	•	S/EW	-	4077 lm	3258 lm	80	10	44000 h	●	305989
LED	18 W	I		80	4000	•	S/EW	-	2718 lm	2246 lm	80	10	44000 h	●	305988

NORMA+ 120 CL

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Ø ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	45 W	I		80	4000	•	S/EW	-	6795 lm	5215 lm	80	10	44000 h	●	305944
LED	34 W	I		80	4000	•	S/EW	-	5134 lm	3932 lm	80	10	44000 h	●	305943
LED	25 W	I		80	4000	•	S/EW	-	3775 lm	3002 lm	80	10	44000 h	●	305942



Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	45 W	I		80	4000	•	S/EW	-	6795 lm	5215 lm	80	10	44000 h	●	306163
LED	34 W	I		80	4000	•	S/EW	-	5134 lm	3932 lm	80	10	44000 h	●	306162
LED	25 W	I		80	4000	•	S/EW	-	3775 lm	3002 lm	80	10	44000 h	●	306161

Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	45 W	I		80	4000	•	S/EW	-	6795 lm	5215 lm	80	10	44000 h	●	305992
LED	34 W	I		80	4000	•	S/EW	-	5134 lm	3932 lm	80	10	44000 h	●	305991
LED	25 W	I		80	4000	•	S/EW	-	3775 lm	2898 lm	80	10	44000 h	●	305990


Power LED - Emergency 1P 220-240 V 50/60 Hz

LED	45 W	I		80	4000	•	S/EW	-	6795 lm	5215 lm	80	10	44000 h	●	306000
LED	34 W	I		80	4000	•	S/EW	-	5134 lm	3932 lm	80	10	44000 h	●	305999
LED	25 W	I		80	4000	•	S/EW	-	3775 lm	3002 lm	80	10	44000 h	●	305998

NORMA+ 150 CL


IK09 15J xx7

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	68 W	I	80	4000	•	S/EW	-	10268 lm	8395 lm	80	10	44000 h	●	305947
LED	60 W	I	80	4000	•	S/EW	-	9060 lm	7556 lm	80	10	44000 h	●	305946
LED	35 W	I	80	4000	•	S/EW	-	5285 lm	4355 lm	80	10	44000 h	●	305945
Power LED dimmable 1-10 V 220-240 V 50/60 Hz														
LED	68 W	I	80	4000	•	S/EW	-	10268 lm	8395 lm	80	10	44000 h	●	306166
LED	60 W	I	80	4000	•	S/EW	-	9060 lm	7556 lm	80	10	44000 h	●	306165
LED	35 W	I	80	4000	•	S/EW	-	5285 lm	4355 lm	80	10	44000 h	●	306164
Power LED - dimmable DALI 220-240 V 50/60 Hz														
LED	68 W	I	80	4000	•	S/EW	-	10268 lm	8395 lm	80	10	44000 h	●	305995
LED	60 W	I	80	4000	•	S/EW	-	9060 lm	7556 lm	80	10	44000 h	●	305994
LED	35 W	I	80	4000	•	S/EW	-	5285 lm	4355 lm	80	10	44000 h	●	305993
Power LED - Emergency 220-240 V 50/60 Hz														
LED	68 W	I	80	4000	•	S/EW	-	10268 lm	8395 lm	80	10	44000 h	●	306003
LED	60 W	I	80	4000	•	S/EW	-	9060 lm	7556 lm	80	10	44000 h	●	306002
LED	35 W	I	80	4000	•	S/EW	-	5285 lm	4355 lm	80	10	44000 h	●	306001




OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
NORMA+ 120		
Galvanized steel protection grills, to be fixed on ceiling.		14430995
NORMA+ 150		
Galvanized steel protection grills, to be fixed on ceiling.		14431995




14430995






14431995

Through wiring connection



NORMA+ 60/120/150 CL

NORMA+ 60/120/150 CL
1-10VNORMA+ 60/120/150 CL
DALINORMA+ 60/120/150 CL
EM 1H

NORMA+ 60	NORMA+ 120	NORMA+ 150
max 0,69 kg	max 1,24 kg	max 1,56 kg
NORMA+ 60 CL	NORMA+ 120 CL	NORMA+ 150 CL
max 0,86 kg	max 1,85 kg	max 2,15 kg

