
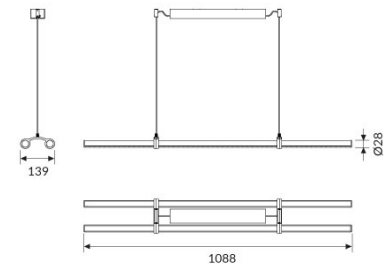
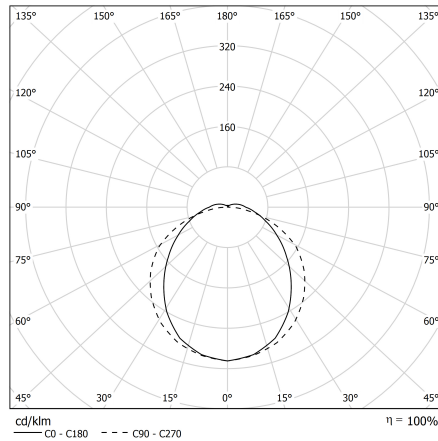


## PIPE LINE PG

Methacrylate satin diffuser for soft emission with UGR<22.

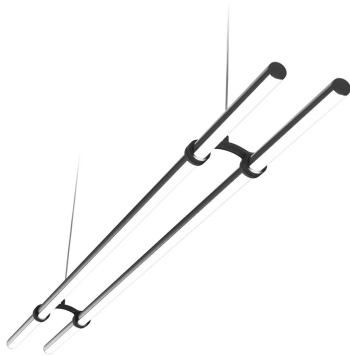

CODE		FLUX	SIZE	CERTIFICATIONS
86PG48L490	48W 4000K	6354lm	1088mm	CE IP40 A <sup>+</sup>

### Optic

Methacrylate satin diffuser for soft emission with UGR<22.

### Specifications

CRI>90  
McAdams 3  
Life Time: L80/B10 >50.000h  
5 years complete warranty  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Aluminium body with epoxy powder coating.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.