

SHIELD+ 1




Part number	3106354
Lampholder:	LED
Light Source:	LED
Wattage:	13/19/27 W
Finish:	AN-96 / Anthracite gray / Textured
Insulation class:	I
Degree of protection:	IP66
IK-J-xxIP:	IK07 2J xx5
CRI:	80
Kelvin:	4000
Power factor:	$\text{COS}\phi \geq 0,9$
Optic:	Asymmetric extra wide reflector
Lightsource lumen output:	3605 lm
Luminaire lumen output:	3072 lm
L:	L80
B:	B10
Lifetime:	220000 h
Ta MIN luminaire:	-20°
Ta MAX luminaire:	25°
ULR:	0%



Description

- Range of indoor and outdoor wall mounted LED fixtures, comprising:
- Polyester powder coated ISO 9227 die-cast aluminium housing
 - Powder polyester painting process optimized against UV rays in 13 different steps ISO 9227
 - Flat toughened glass diffuser
 - Technopolymer reflector with high efficiency aluminium protective surface treatment
 - Silicone gasket
 - High power LEDs with next generation high intensity light beam
 - Controlled heat dissipation to guarantee long-lasting LED operation
 - Multi-power version furnished with Dip Switch for the selection of three power levels, which can be set in the installation phase
 - Dimmable DALI
 - EXTREME versions are suitable for extreme conditions, -40°C
 - Through-wiring possible
 - Twilight models (C versions) complete with dusk sensor are available on request
 - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08
 - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Photometric data

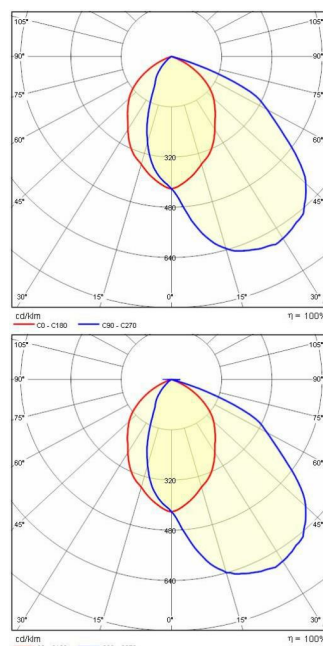

Technical drawings

