



STRIP SQUARE+ INGROUND

design by R. FIORATO - F. PAGLIARINI

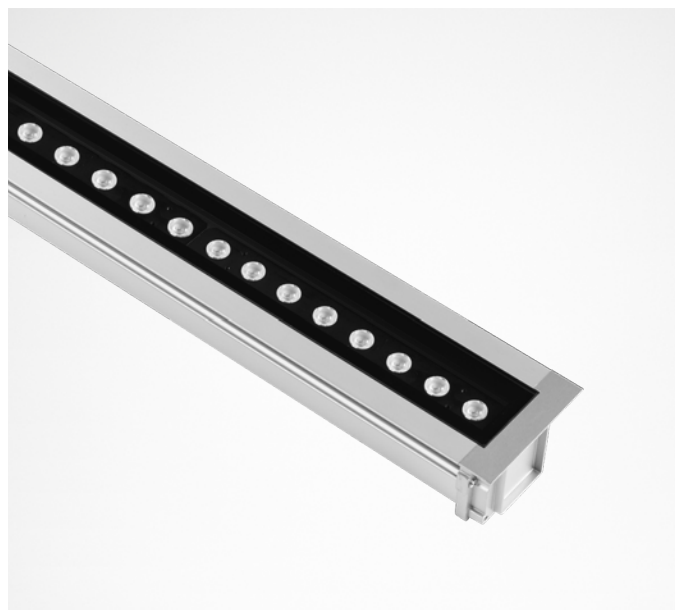

● GR-11 / Anodised grey / Matt

Series of class I reduced depth in-ground luminaires, comprising:



- Extruded anodised aluminium housing
- Tempered glass diffuser, screen-printed inside
- Die-cast aluminium end caps, painted
- Anti-ageing silicone gasket
- QUICK versions are supplied complete with IP rated connection box suitable for through wiring for Ø 5 mm to Ø 13 mm cables
- Stainless steel locking screws
- Aluminium gear tray for high heat dissipation of components
- Built-in driver
- Available with ON-OFF driver and dimmable DALI
- Light colour and brightness adjustable via Tunable White control
- TW - TUNABLE WHITE(2700 ÷ 6500 K) version DALI DT8
- DMX signal generator for RGBW versions to be ordered separately
- Recessed box to be ordered separately
- Through-wiring designed
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08



Restaurant burg landshut - Bernkastel-Kues - Germany



pg 254
STRIP SQUARE+

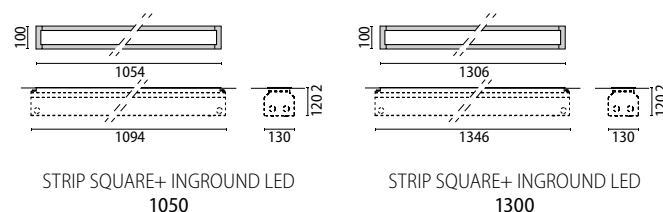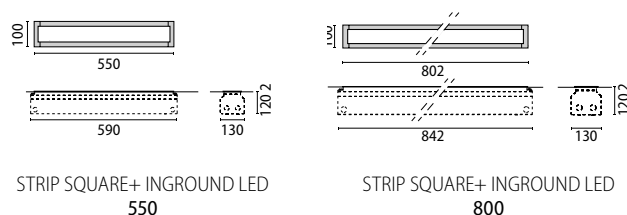

STRIP SQUARE+ INGROUND 550

IK10 20J xx9

WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	CLOUR/ RAL	LENGTH	PART NUMBER
Power LED 220-240 V 50/60 Hz														
14 W	I	-	80	4000	✓	S/I	-	2000 lm	1519 lm	80	10	60000 h	●	550 mm 3109350
14 W	I	-	80	4000	✓	ELL	15°x45°	2000 lm	1478 lm	80	10	60000 h	●	550 mm 3109352
14 W	I	-	80	4000	✓	ELL	40°x60°	2000 lm	1478 lm	80	10	60000 h	●	550 mm 3109354
14 W	I	-	80	4000	✓	A/M	-	2000 lm	1467 lm	80	10	60000 h	●	550 mm 3109356
14 W	I	-	80	3000	✓	S/I	-	2000 lm	1425 lm	80	10	60000 h	●	550 mm 3109349
14 W	I	-	80	3000	✓	ELL	15°x45°	2000 lm	1384 lm	80	10	60000 h	●	550 mm 3109351
14 W	I	-	80	3000	✓	ELL	40°x60°	2000 lm	1384 lm	80	10	60000 h	●	550 mm 3109353
14 W	I	-	80	3000	✓	A/M	-	2000 lm	1374 lm	80	10	60000 h	●	550 mm 3109355

Power LED - dimmable DALI 220-240 V 50/60 Hz


14 W	I	-	80	4000	✓	S/I	-	2000 lm	1519 lm	80	10	60000 h	●	550 mm 3109382
14 W	I	-	80	4000	✓	ELL	15°x45°	2000 lm	1478 lm	80	10	60000 h	●	550 mm 3109384
14 W	I	-	80	4000	✓	ELL	40°x60°	2000 lm	1478 lm	80	10	60000 h	●	550 mm 3109386
14 W	I	-	80	4000	✓	A/M	-	2000 lm	1467 lm	80	10	60000 h	●	550 mm 3109388
14 W	I	-	80	3000	✓	S/I	-	2000 lm	1425 lm	80	10	60000 h	●	550 mm 3109381
14 W	I	-	80	3000	✓	ELL	15°x45°	2000 lm	1384 lm	80	10	60000 h	●	550 mm 3109383
14 W	I	-	80	3000	✓	ELL	40°x60°	2000 lm	1384 lm	80	10	60000 h	●	550 mm 3109385
14 W	I	-	80	3000	✓	A/M	-	2000 lm	1374 lm	80	10	60000 h	●	550 mm 3109387

RGBW LED

15 W	III	-	-	rgbw	✓	ELL	15°x45°	-	-	80	10	60000 h	●	550 mm 3109417
------	-----	---	---	------	---	-----	---------	---	---	----	----	---------	---	-----------------------

TunableWhite Power LED - dimmable DALI DT8 - 220-240 V 50/60 Hz

16 W	I	-	80	2700 - 6500	✓	ELL	15°x45°	-	-	80	10	60000 h	●	550 mm 3109413
------	---	---	----	-------------	---	-----	---------	---	---	----	----	---------	---	-----------------------

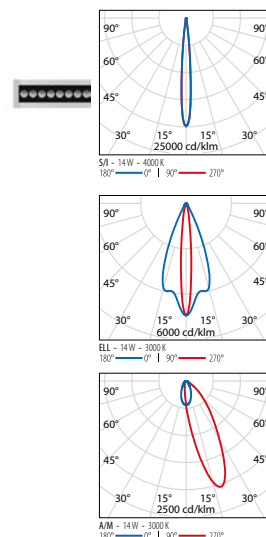

STRIP SQUARE+ INGROUND 800

IK10 20J xx9

WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	CLOUR/ RAL	LENGTH	PART NUMBER
Power LED 220-240 V 50/60 Hz														
20.5 W	I	-	80	4000	✓	S/I	-	3000 lm	2215 lm	80	10	60000 h	●	802 mm 3109358
20.5 W	I	-	80	4000	✓	ELL	15°x45°	3000 lm	2152 lm	80	10	60000 h	●	802 mm 3109360
20.5 W	I	-	80	4000	✓	ELL	40°x60°	3000 lm	2151 lm	80	10	60000 h	●	802 mm 3109362
20.5 W	I	-	80	4000	✓	A/M	-	3000 lm	2136 lm	80	10	60000 h	●	802 mm 3109364
20.5 W	I	-	80	3000	✓	S/I	-	3000 lm	2074 lm	80	10	60000 h	●	802 mm 3109357
20.5 W	I	-	80	3000	✓	ELL	15°x45°	3000 lm	2015 lm	80	10	60000 h	●	802 mm 3109359
20.5 W	I	-	80	3000	✓	ELL	40°x60°	3000 lm	2014 lm	80	10	60000 h	●	802 mm 3109361
20.5 W	I	-	80	3000	✓	A/M	-	3000 lm	2000 lm	80	10	60000 h	●	802 mm 3109363

Power LED - dimmable DALI 220-240 V 50/60 Hz


20.5 W	I	-	80	4000	✓	S/I	-	3000 lm	2215 lm	80	10	60000 h	●	802 mm 3109390
20.5 W	I	-	80	4000	✓	ELL	15°x45°	3000 lm	2152 lm	80	10	60000 h	●	802 mm 3109392
20.5 W	I	-	80	4000	✓	ELL	40°x60°	3000 lm	2151 lm	80	10	60000 h	●	802 mm 3109394
20.5 W	I	-	80	4000	✓	A/M	-	3000 lm	2136 lm	80	10	60000 h	●	802 mm 3109396
20.5 W	I	-	80	3000	✓	S/I	-	3000 lm	2074 lm	80	10	60000 h	●	802 mm 3109389
20.5 W	I	-	80	3000	✓	ELL	15°x45°	3000 lm	2015 lm	80	10	60000 h	●	802 mm 3109391
20.5 W	I	-	80	3000	✓	ELL	40°x60°	3000 lm	2014 lm	80	10	60000 h	●	802 mm 3109393
20.5 W	I	-	80	3000	✓	A/M	-	3000 lm	2000 lm	80	10	60000 h	●	802 mm 3109395

RGBW LED

21 W	III	-	-	rgbw	✓	ELL	15°x45°	-	-	80	10	60000 h	●	802 mm 3109418
------	-----	---	---	------	---	-----	---------	---	---	----	----	---------	---	-----------------------

TunableWhite Power LED - dimmable DALI DT8 - 220-240 V 50/60 Hz

22 W	I	-	80	2700 - 6500	✓	ELL	15°x45°	-	-	80	10	60000 h	●	802 mm 3109414
------	---	---	----	-------------	---	-----	---------	---	---	----	----	---------	---	-----------------------

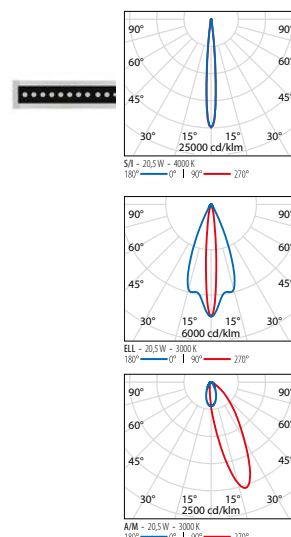

STRIP SQUARE+ INGROUND 1050

IK10 20J xx9

WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	LENGTH	PART NUMBER
Power LED 220-240 V 50/60 Hz														
26 W	I	-	80	4000	✓	S/I	-	4000 lm	2946 lm	80	10	60000 h	●	1054 mm 3109366
26 W	I	-	80	4000	✓	ELL	15°x45°	4000 lm	2861 lm	80	10	60000 h	●	1054 mm 3109368
26 W	I	-	80	4000	✓	ELL	40°x60°	4000 lm	2861 lm	80	10	60000 h	●	1054 mm 3109370
26 W	I	-	80	4000	✓	A/M	-	4000 lm	2841 lm	80	10	60000 h	●	1054 mm 3109372
26 W	I	-	80	3000	✓	S/I	-	4000 lm	2759 lm	80	10	60000 h	●	1054 mm 3109365
26 W	I	-	80	3000	✓	ELL	15°x45°	4000 lm	2679 lm	80	10	60000 h	●	1054 mm 3109367
26 W	I	-	80	3000	✓	ELL	40°x60°	4000 lm	2679 lm	80	10	60000 h	●	1054 mm 3109369
26 W	I	-	80	3000	✓	A/M	-	4000 lm	2660 lm	80	10	60000 h	●	1054 mm 3109371

Power LED - dimmable DALI 220-240 V 50/60 Hz


26 W	I	-	80	4000	✓	S/I	-	4000 lm	2946 lm	80	10	60000 h	●	1054 mm 3109398
26 W	I	-	80	4000	✓	ELL	15°x45°	4000 lm	2861 lm	80	10	60000 h	●	1054 mm 3109400
26 W	I	-	80	4000	✓	ELL	40°x60°	4000 lm	2861 lm	80	10	60000 h	●	1054 mm 3109402
26 W	I	-	80	4000	✓	A/M	-	4000 lm	2841 lm	80	10	60000 h	●	1054 mm 3109404
26 W	I	-	80	3000	✓	S/I	-	4000 lm	2759 lm	80	10	60000 h	●	1054 mm 3109397
26 W	I	-	80	3000	✓	ELL	15°x45°	4000 lm	2679 lm	80	10	60000 h	●	1054 mm 3109399
26 W	I	-	80	3000	✓	ELL	40°x60°	4000 lm	2679 lm	80	10	60000 h	●	1054 mm 3109401
26 W	I	-	80	3000	✓	A/M	-	4000 lm	2660 lm	80	10	60000 h	●	1054 mm 3109403

RGBW LED

27 W	III	-	-	rgbw	✓	ELL	15°x45°	-	-	80	10	60000 h	●	1054 mm 3109419
------	-----	---	---	------	---	-----	---------	---	---	----	----	---------	---	------------------------

TunableWhite Power LED - dimmable DALI DT8 - 220-240 V 50/60 Hz

28 W	I	-	80	2700 - 6500	✓	ELL	15°x45°	-	-	80	10	60000 h	●	1054 mm 3109415
------	---	---	----	-------------	---	-----	---------	---	---	----	----	---------	---	------------------------

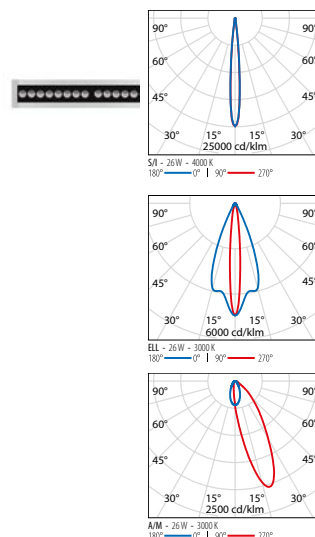

STRIP SQUARE+ INGROUND 1300

IK10 20J xx9

WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	LENGTH	PART NUMBER
Power LED 220-240 V 50/60 Hz														
33 W	I	-	80	4000	✓	S/I	-	5000 lm	3861 lm	80	10	60000 h	●	1306 mm 3109374
33 W	I	-	80	4000	✓	ELL	15°x45°	5000 lm	3575 lm	80	10	60000 h	●	1306 mm 3109376
33 W	I	-	80	4000	✓	ELL	40°x60°	5000 lm	3574 lm	80	10	60000 h	●	1306 mm 3109378
33 W	I	-	80	4000	✓	A/M	-	5000 lm	3549 lm	80	10	60000 h	●	1306 mm 3109380
33 W	I	-	80	3000	✓	S/I	-	5000 lm	3447 lm	80	10	60000 h	●	1306 mm 3109373
33 W	I	-	80	3000	✓	ELL	15°x45°	5000 lm	3348 lm	80	10	60000 h	●	1306 mm 3109375
33 W	I	-	80	3000	✓	ELL	40°x60°	5000 lm	3347 lm	80	10	60000 h	●	1306 mm 3109377
33 W	I	-	80	3000	✓	A/M	-	5000 lm	3323 lm	80	10	60000 h	●	1306 mm 3109379

Power LED - dimmable DALI 220-240 V 50/60 Hz


33 W	I	-	80	4000	✓	S/I	-	5000 lm	3861 lm	80	10	60000 h	●	1306 mm 3109406
33 W	I	-	80	4000	✓	ELL	15°x45°	5000 lm	3575 lm	80	10	60000 h	●	1306 mm 3109408
33 W	I	-	80	4000	✓	ELL	40°x60°	5000 lm	3574 lm	80	10	60000 h	●	1306 mm 3109410
33 W	I	-	80	4000	✓	A/M	-	5000 lm	3549 lm	80	10	60000 h	●	1306 mm 3109412
33 W	I	-	80	3000	✓	S/I	-	5000 lm	3447 lm	80	10	60000 h	●	1306 mm 3109405
33 W	I	-	80	3000	✓	ELL	15°x45°	5000 lm	3348 lm	80	10	60000 h	●	1306 mm 3109407
33 W	I	-	80	3000	✓	ELL	40°x60°	5000 lm	3347 lm	80	10	60000 h	●	1306 mm 3109409
33 W	I	-	80	3000	✓	A/M	-	5000 lm	3323 lm	80	10	60000 h	●	1306 mm 3109411

RGBW LED

32 W	III	-	-	rgbw	✓	ELL	15°x45°	-	-	80	10	60000 h	●	1306 mm 3109420
------	-----	---	---	------	---	-----	---------	---	---	----	----	---------	---	------------------------

TunableWhite Power LED - dimmable DALI DT8 - 220-240 V 50/60 Hz

35 W	I	-	80	2700 - 6500	✓	ELL	15°x45°	-	-	80	10	60000 h	●	1306 mm 3109416
------	---	---	----	-------------	---	-----	---------	---	---	----	----	---------	---	------------------------

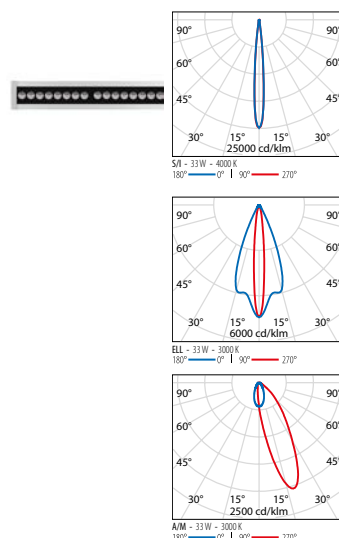

CONTROL GEAR

DESCRIPTION	COLOR	PART NUMBER
RGBW		
Box for RGBW continuous row		3109576
DMX		
DMX signal generator DDS643		3109573
STRIP SQUARE+ INGROUND		
Driver - CV 100 W - 48 V kit		310950
Driver - CV 500 W - 48 V kit		310951



310950



310951

MANDATORY ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
STRIP SQUARE+ INGROUND		
Recessed fixing kit L 590 mm		310422
Recessed fixing kit L 842 mm		310423
Recessed fixing kit L 1094 mm		310424
Recessed fixing kit L 1346 mm		310425



310422
310423
310424
310425



Complete unit

1A+1B = please order 2 codes

	components
A	gear body
B	recessed fixing kit