



# STRIP SQUARE+ 528 RGBW

## Part number 3109339





























#### Description

Indoor and outdoor wall-mount luminaire, comprising:

- Extruded anodised aluminium housing
- Toughened, glass diffuser, silk-screened on the inside
- Coated die-cast aluminium end caps
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel locking hardware
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
- Adjustable wall mounting bracket for directing the luminaire
- High heat-dissipating aluminium gear tray for increased inner components lifespan
- DMX signal generator for RGBW versions available (ordered separately)

To maintain the regular updating of our products, PERFORMANCE in LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available athttps://www.performanceinlighting.com/qr/company/led-warranty



D	ra	d١	ıct.	4	ata
	ľ	uι	ıιι	u	ala


ETIM Group:	EG000027	ETIM Class:	EC002892
General information			
Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	1456	Luminaire lumen output [lm]:	855
Luminaire wattage [W]:	15 W	Luminous efficacy [lm/W]:	57
CRI:	80	Colour temperature [K]:	rgbw 2700
Colour / Finishing:	GR-11 / Anodised grey / Matt	IP degree of protection:	IP66
IK-J-xxIP:	IK10 20J xx9	Protection class:	III
Optic:	ELL - Elliptical	Beam angle:	15*x45*
Net weight [kg]:	3.302	Overall length [mm]:	528
Overall width [mm]:	139	Overall height [mm]:	71
Mechanical features			
Shape:	Rectangular	Housing material:	Aluminium
Diffuser material:	Glass		
Electrical features			
Voltage type:	DC	Power factor / COS Φ:	>0.9
Input voltage [V DC]:	48		
Installation			
Application area:	Outdoor	Mounting type:	Linear surface
lin. ambient temperature [°C]: -10		Max. ambient temperature [°C]: 35	
Light features			
MacAdam:	3	Lumen maintenance:	L80B10@60000h
Zero light pollution (ULR = 0%):			

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available athttps://www.performanceinlighting.com/qr/company/led-warranty

Fax +39 045 61 59 292



## Photometric data

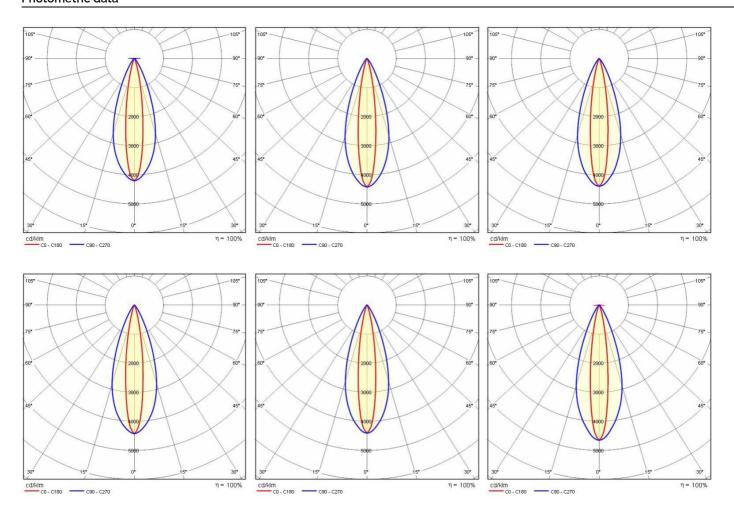

## Control gear

### STRIP SQUARE+



**310950** Driver - CV 100 W - 48 V kit



**310951** Driver - CV 500 W - 48 V kit

STRIP SQUARE+ RGBW

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available athttps://www.performanceinlighting.com/qr/company/led-warranty





#### 3117844

Controller DMX touch white

WH-87 / White




#### 3117845

Controller DMX touch black

BK-81 / Black

## Optional accessories

## STRIP SQUARE+



## 3115612

USB key EcoEcco



#### 3114174

Connector 4 way IP68



#### 310496

Connection Kit Y 3-way Ø 7-10.5 mm



## 310495

Connection Kit Y 3-way Ø 14-17 mm IP68