

## **Arm-mounted luminaire TANEO** TND 2100/D50/D

113736000-00810095



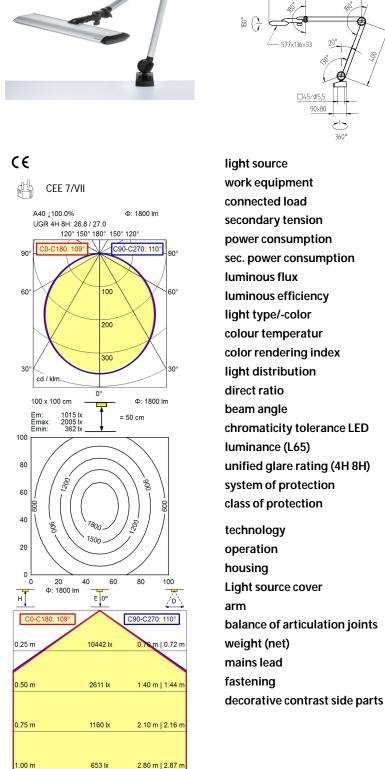




light source work equipment connected load secondary tension power consumption sec. power consumption luminous flux luminous efficiency light type/-color colour temperatur color rendering index light distribution direct ratio beam angle chromaticity tolerance LED luminance (L65) unified glare rating (4H 8H) system of protection class of protection technology operation housing Light source cover arm balance of articulation joints weight (net) mains lead

LED electronic transformer 100 - 240 V; AC; 50 Hz; 60 Hz 24 V ca. 38 W ca. 33 W approx. 1.800 lm approx. 54 lm/W D50 standard light; cold white approx. 5.000 K  $CRI \ge 95; R9 \ge 85$ direct approx. 100 % 110° < 3 SDCM  $\leq 23.000 \text{ cd/m}^2$ ≤ 28 IP 20 I with plug-in power supply; III without plug-in power supply Touch DIM multi-function switch aluminium coloured anodised milky; plastic silver metallic spring ca. 2,3 kg ca. 3,4 m; mains plug; CEE 7/VII table base black

## Arm-mounted luminaire TANEO TND 2100/D50/D

113736000-00810095







Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.