






# PA356 - 3.81

## Pluggable terminal block



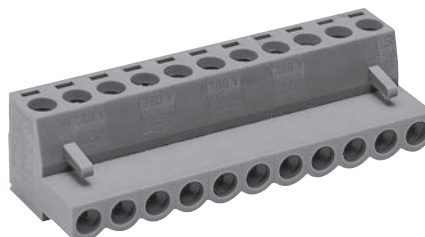


### Technical data

	IEC	UL / CSA	
<b>Pitch</b>	3.81 mm	0.15"	
<b>Poles</b>	2 ÷ 12		
<b>Versions</b>	HO horizontal (wire parallel to the insertion direction)		
<b>Ratings</b>	125V - 13.5A	125V - 10A	
<b>Wire size</b>	1.0 sqmm	22 ÷ 18 AWG	
<b>Working Temperature</b>	-5 ÷ 125 °C (short time 155 °C)	23 ÷ 221 °F	
<b>Plastic Material</b>	Green Polyamide PA6.8, UL94-VO, CTI600V, GWT960 °C		
<b>Metal Parts</b>	Spring contact made in nickel plated phosphorous bronze; Cage insert made in nickel plated brass; M2 Screw made in zinc plated steel		
<b>Screw Torque</b>	0.4 Nm	2.5 lb-in	
<b>Accessories</b>			
Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	EH539	1.0sqmm - 125V - 13.5A - 125 °C	EN60998-1; EN60998-2-1
	118766 ÜG	1.0sqmm - 125V - 10A - -5 ÷ 125 °C	DIN VDE 0627:1991-09

### Dimensional drawing

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

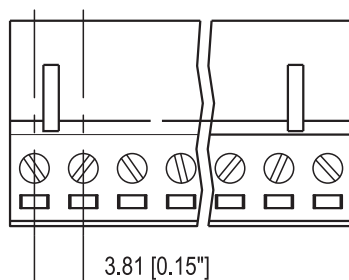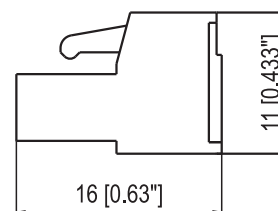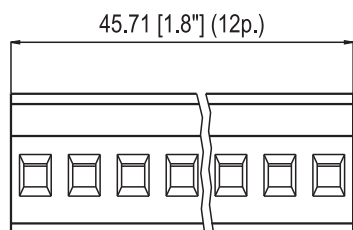



# PA356 - 3.81

## Packaging

Type	P-N	Pack
PA 356/3.81/2	00113052	100
PA 356/3.81/3	00113053	100
PA 356/3.81/4	00113054	100
PA 356/3.81/5	00113055	100
PA 356/3.81/6	00113056	100
PA 356/3.81/7	00113057	100
PA 356/3.81/8	00113058	100
PA 356/3.81/9	00113059	100
PA 356/3.81/10	00113060	100
PA 356/3.81/11	00113061	100
PA 356/3.81/12	00113062	100


## Pallets

Europallets





# PA357 - 3.81
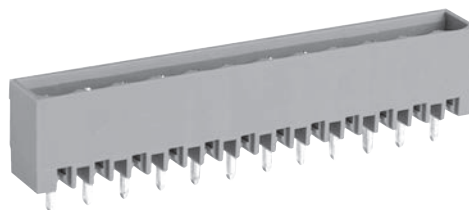
## Header terminal block




### Technical data

	IEC	UL / CSA
<b>Pitch</b>	3.81 mm	0.15"
<b>Poles</b>	2 ÷ 12	
<b>Versions</b>	VE/A vertical open - VE/C vertical closed - HO/A horizontal open - HO/C horizontal closed	
<b>Ratings</b>	125V - 13.5A	125V - 10A
<b>Wire size</b>	n.a.	n.a.
<b>Working Temperature</b>	-5 ÷ 125 °C (short time 155 °C)	23 ÷ 221 °F
<b>Plastic Material</b>	Green Polyamide PA6.8, UL94-VO, CTI600V, GWT960 °C	
<b>Metal Parts</b>	Soldering pin made in tin plated brass	
<b>Screw Torque</b>	n.a.	n.a.
<b>Accessories</b>		

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	EH539	125V - 13.5A - 125 °C	EN60998-1; EN60998-2-1
	118766 ÜG	125V - 10A - -5 ÷ 125 °C	DIN VDE 0627:1991-09

### Dimensional drawing

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

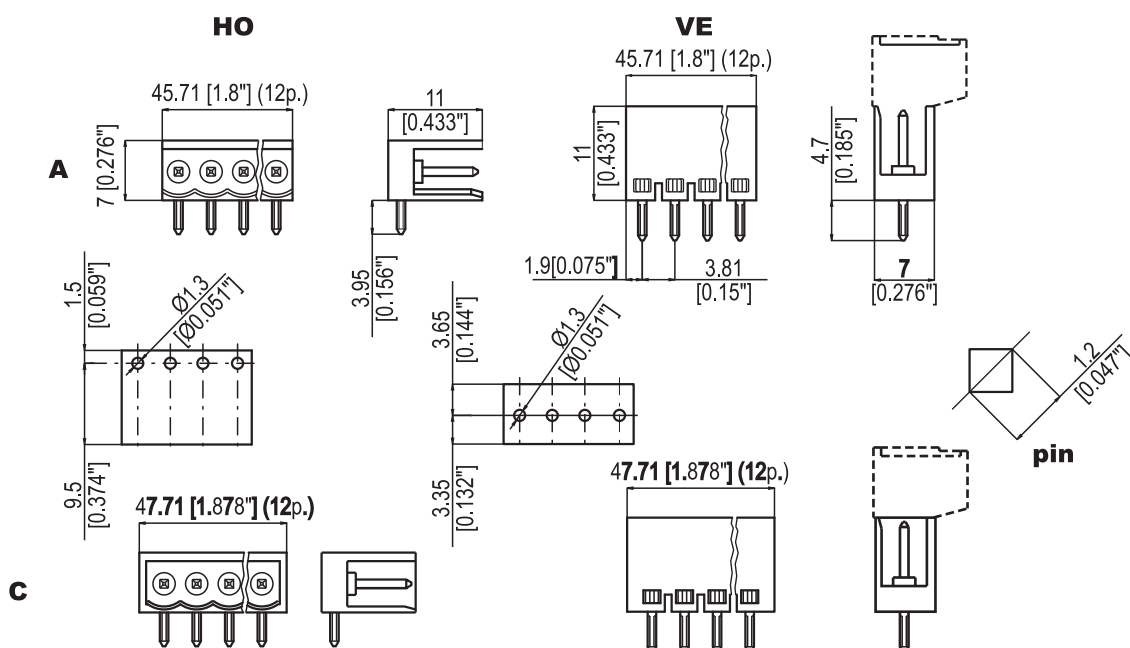



# PA357 - 3.81

## Packaging

Type	P-N:	VE/A	VE/C	HO/A	HO/C	Pack
PA 357/3.81/2		00113702	00113802	00113752	00113852	100
PA 357/3.81/3		00113703	00113803	00113753	00113853	100
PA 357/3.81/4		00113704	00113804	00113754	00113854	100
PA 357/3.81/5		00113705	00113805	00113755	00113855	100
PA 357/3.81/6		00113706	00113806	00113756	00113856	100
PA 357/3.81/7		00113707	00113807	00113757	00113857	100
PA 357/3.81/8		00113708	00113808	00113758	00113858	100
PA 357/3.81/9		00113709	00113809	00113759	00113859	100
PA 357/3.81/10		00113710	00113810	00113760	00113860	100
PA 357/3.81/11		00113711	00113811	00113761	00113861	100
PA 357/3.81/12		00113712	00113812	00113762	00113862	100

## Pallets

Europallets