

GUELL 4



Colors:

94

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminium housing chemically pre-treated and painted with polyester powder coating
- Flat extra clear tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-aging silicone gasket
- Electrical connection box in black technopolymer
- Cable gland for cables Ø 7 - Ø 17 mm
- Dimmable driver 1-10 V ballast
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Steel bracket, hot galvanised and painted in polyester powder
- Cataphoresis and polyester-powder coated steel-sheet gear housing
- 3000 K and 5000 K available upon request




GUELL 4
A/W



GUELL 4
S/W

Lamps

LED n. 12 LED - 430 W

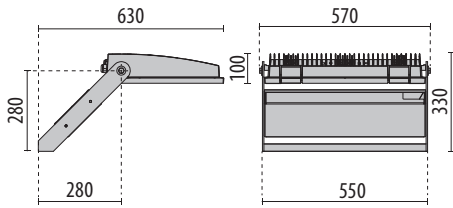

GUELL 4 A/W

IK07 3J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED dimmable 1-10 V 220/240 V 50/60 Hz																			
n. 12 LED	430 W	-	-	94	I		4000	-	-	A40/W	-	54432 lm	43532 lm	130000 h	L70	-	06210394		



GUELL 4 S/W

IK07 3J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED dimmable 1-10 V 220/240 V 50/60 Hz																			
n. 12 LED	430 W	-	-	94	I		4000	-	-	S/W	-	54432 lm	47476 lm	130000 h	L70	-	06210094		



OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER	EURO
GUELL 4			
A0665 Protective grid GUELL 4	-	14452702	
A0666 Cover GUELL 4	94	14452894	



A0665



A0666

