

# INSERT+ 1 MARINE




Series of wall recessed luminaires for indoor and outdoor general lighting use in two sizes, comprising:

- Painted die-cast aluminium housing
- Diffuser in flat glass, internally frosted
- EPDM gasket
- Die cast polished brass ring with vibratory finishing.
- External electrical connection with sealed plug-socket QUICK, complete with cable
- Electrical connector for wires Ø 7 - Ø 12 mm
- LED versions include 220/240 V 50/60 Hz safety transformer

- Stainless steel locking screws
- The fixture requires recessed fixing box which must be ordered separately
- The recessed box is equipped with a removable cover and provided with two spirit levels to facilitate the installation process
- Supplied with 0,2 m pre-wired H07RN-F cable
- Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish



● BR-10 / Natural brass / Glossy




Please visit our web site  
[www.performanceinlighting.com](http://www.performanceinlighting.com)  
 for the latest updated versions available.

## INSERT+ 1 MARINE


IK07 2J xx5

WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>													
7 W	I	-	70	4000	✓	A37/M	-	850 lm	354 lm	80	10	60000 h	● 304792
7 W	I	-	70	3000	✓	A37/M	-	825 lm	325 lm	80	10	60000 h	● 304791

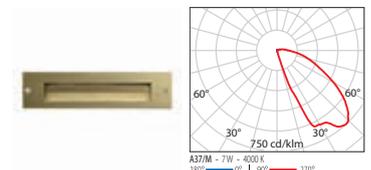


## MANDATORY ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
<b>INSERT+ 1 MARINE</b>		
Recessed box INSERT+ 1		<b>310475</b>



**Complete unit**  
 1A+1B = please order 2 codes

COMPONENTS
<b>A</b> luminaire
<b>B</b> recessed fixing kit



**310475**