

LAMA+ MINI S/W

Part number 3101184



Description

Suspended LED luminaire for indoor and outdoor industrial applications, comprising:

- Die-cast aluminium housing and cover, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-transparency polycarbonate optics
- Symmetrical optic with UGR<22
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- IP66-rated, PA66 with silver-plated brass contacts, fast connector, complete with factory pre-wired cable, for mains connection without opening the luminaire, for cables Ø 9 - Ø 12 mm
- Galvanised steel suspension hooks
- Stainless steel locking hardware
- Stainless steel locking springs for the glass
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qc/company/terms-and-conditions

Product data

ETIM Group:	EG000027	ETIM Class:	EC001716
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	16732	Luminaire lumen output [lm]:	13921.90
Luminaire wattage [W]:	101 W	Luminous efficacy [lm/W]:	138
CRI:	80	Kelvin:	4000
Colour / Finish:	WH-87 / White / Textured	IP degree of protection:	IP66
IK-J-xxIP:	IK06 1J xx3	Insulation class:	I
Optic:	SYMMETRIC WIDE	Net weight [kg]:	4.322

Mechanical features

Shape:	RECTANGULAR	Housing material:	ALUMINIUM
Diffuser material:	GLASS		

Electrical features

Voltage type:	AC/DC	Power factor / COS Φ:	>0.9
Surge protection Common [kV]:	4.0	Inrush current [A/μs]:	9 / 456


Installation

Application area:	Indoor	Mounting type:	Hi / low-bay
Min. ambient temperature [°C]:	-40	Max. ambient temperature [°C]:	35
Min. distance from lighted object [m]:	0.50		

Light features

MacAdam:	3	Lumen maintenance:	L90B10@100000h
Distribution of light emission:	Direct		

Photometric data

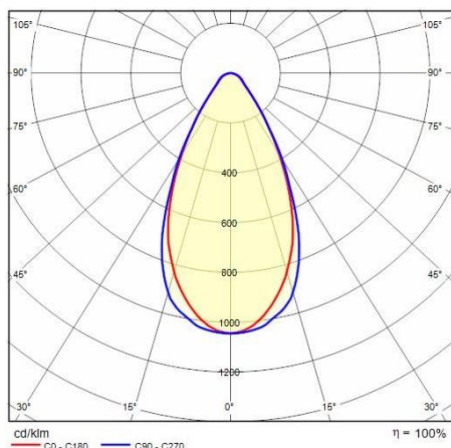

To maintain the regular updating of our products, PERFORMANCE in LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of $\pm 7\%$, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions