



light source

work equipment
connected load
Power consumption
luminous flux
luminous efficacy
colour temperature
color rendering index (CRI)
glare control
System of protection
class of protection
operation
luminaire body

lamp cover
tubular sections

balance of articulation joints
weight (net)
mains lead

Fastening

LED

Energy efficiency category A/A+/A++
electronic transformer
100-240 V; 50/60 Hz
approx. 24 W
approx. 1300 lm
approx. 54 lm/W
neutral white, approx. 4000 K
≥ 80
conical prismatic screen
IP20
I
multi-function switch
sectional aluminium, anodised, aluminium coloured
anodised
acrylic clear
tubular aluminium section, anodized, aluminium coloured
anodised
spring
approx. 1.9 kg
approx. 3,4 m; mains plug
CEE 7/VII
screw-down flange, table clamp (accessory), wall bracket (accessory)




CEE 7/VII

illuminance

distance: 50 cm

Em: 1137 lx
Emax: 3053 lx
Emin: 159 lx

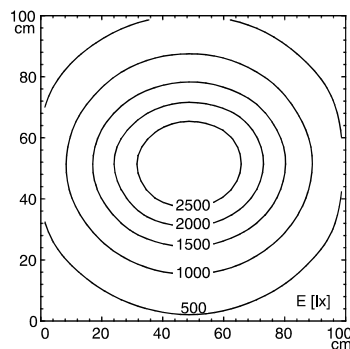

luminous intensity

